



ASHURST IP65

AMENITY LUMINAIRES

For semi-decorative application

High efficiency energy saving compact fluorescent decorative bulkhead, incorporating a 2D lamp, ideally suited to both internal and external applications requiring an IP65 rating.

Designed and manufactured to comply with EN 60598 and are CE certified.

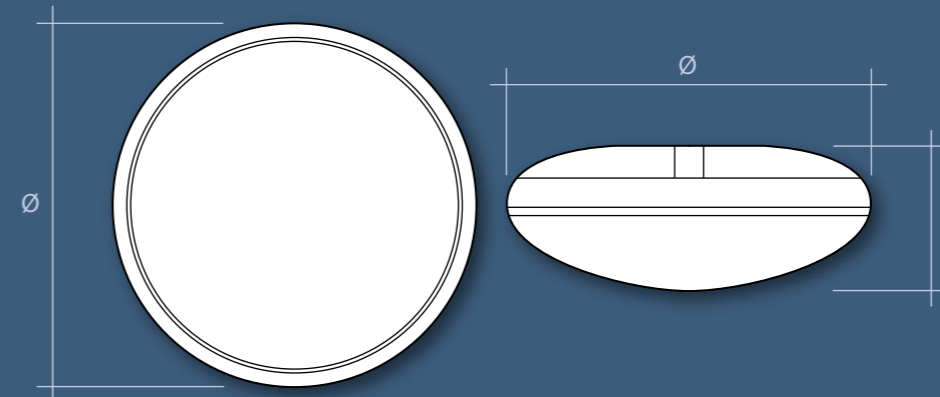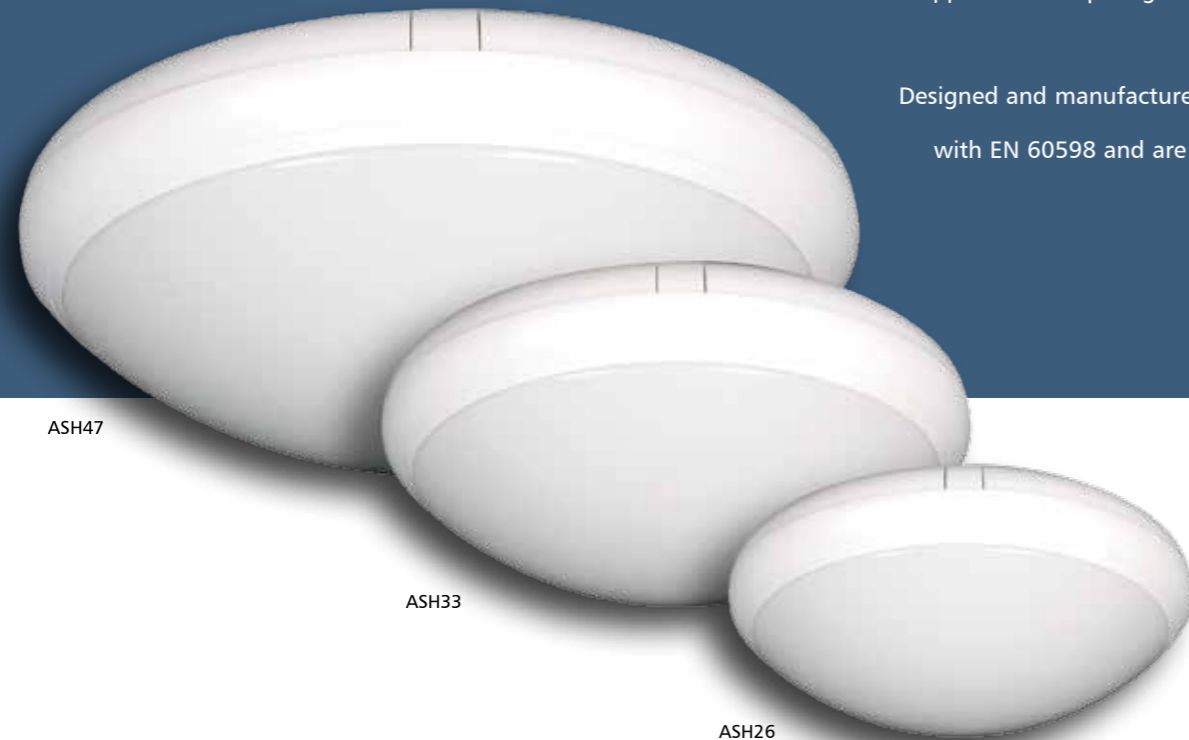

Lamp Options



2D: 2D Compact Fluorescent

Standard Features

- Certified ingress protection to IP65
- White gallery
- Quick release diffuser for speedy maintenance
- Unique push fit conduit entry from one side
- A choice of three sizes available
- High efficiency energy saving 2D lamp included
- Suitable for wall or ceiling mounting
- UV stabilised polycarbonate body and opal diffuser for maximum durability
- Quality integral control gear for long service life
- All gaskets are manufactured from heat resistant silicone rubber to ensure the IP65 rating

To order Features

(Add suffix to order code)

/FTB: Fused terminal block

/HF: High frequency control gear

/E3: Remote maintained three hour emergency (IP 20 rated)

/HF/E3INT: Integral high frequency and maintained three hour emergency

Specification Guide

Ashurst 470

Order Code	Watt	Ø	H	Lamp
ASH47/38	38	470	157	2D
ASH47/55/HF*	55	470	157	2D

Ashurst 330

Order Code	Watt	Ø	H	Lamp
ASH33/21/HF	21	330	126	2D
ASH33/28	28	330	126	2D
ASH33/38*	38	330	126	2D

Ashurst 260

Order Code	Watt	Ø	H	Lamp
ASH26/16	16	260	102	2D
ASH26/21/HF*	21	260	102	2D

* Please note integral emergency version not available.

Example order code:

ASH47/38/E3INT – A 38 watt 2D IP65 fitting with an opal diffuser and white body, fitted with integral 3 hour emergency pack and supplied c/w lamp.



Applications:

- Schools and universities
- Sports and leisure facilities
- Wash rooms and changing rooms
- Hotels
- Foyers, receptions and entrance halls
- Access areas requiring a semi-decorative appearance
- Under canopy applications