

# ECHO IP20

LOW BAY

For general industrial and commercial application


High efficiency low bay luminaires incorporating either metal halide, high pressure sodium, or mercury discharge lamp with power ratings ranging from 150 to 400 watts. A very wide range of accessories are available to offer solutions for demanding applications.

Designed and manufactured to comply with EN 60598 and are CE certified.



### Applications:

- Warehousing
- High rack storage facilities
- Manufacturing plants
- Car maintenance workshops
- Internal sports facilities
- Retail super stores

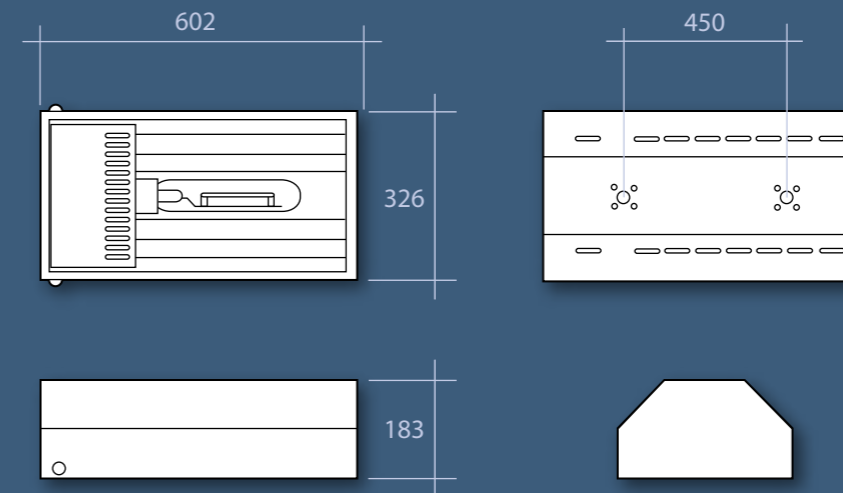

### Lamp Options



S: Tubular High Pressure Sodium



Q: Tubular Metal Halide



M: Elliptical Diffuse Mercury

### Standard Features

- Certified ingress protection to IP20
- Choice of metal halide, high pressure sodium, or mercury lamp included
- Heavy grade epoxy powder coated corrosion resistant body
- Gear tray hinges for ease of installation
- Quality sub components for extended service life
- Wired with high temperature silicone insulated cable for maximum heat resistance
- High purity anodised aluminium reflector for maximum efficiency
- Metal halide versions supplied with toughened front glass for added safety
- Back plate multi-punched for a range of installation options

### To order Features

(Add suffix to order code)

- /TI:** Timed ignitor to prevent lamp cycling
- /FTB:** Fused terminal block
- /TPS:** Power switching
- /MHDIM:** Integral dimming metal halide
- /GLASS:** Toughened front glass
- /WG:** Protective wire guard
- /WGGL:** Protective wire guard for use with toughened front glass
- /DD:** Impact resistant polycarbonate drop dish
- /LV:** White louvre assembly for glare control
- /CL:** Ceiling plate with plug and socket connection for ease of installation
- /RR:** Rack reflector
- /AUX:** Auxiliary start up lamp for improved safety (lamp included)


For Accessories please see page 94

### Specification Guide

Order Code	Watt	Kg	Lamp
ECLB150S	150	6.0	S
ECLB250S	250	7.5	S
ECLB400S	400	9.5	S
ECLB250Q	250	7.5	Q
ECLB400Q	400	9.5	Q
ECLB250M	250	7.5	M
ECLB400M	400	9.5	M

Example order code:  
ECLB250M/DD - A 250 watt mercury low bay luminaire with an impact resistant polycarbonate drop dish diffuser and complete with lamp.

### Photometry

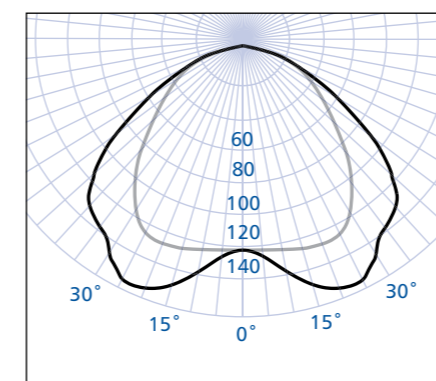

ECLB400S