

ECHO ULL IP20

ULTRA LONG LIFE LOW BAY

For maintenance free application



High efficiency low bay luminaire incorporating either a 100 or 150 watt Osram Endura induction lamp with Quicktronic control gear. A very wide range of accessories are available to offer solutions for demanding applications.

Designed and manufactured to comply with EN 60598 and is CE certified.



Applications:

- Automated 24 hour factory environments
- Installations with limited provision for maintenance or access
- Remote locations

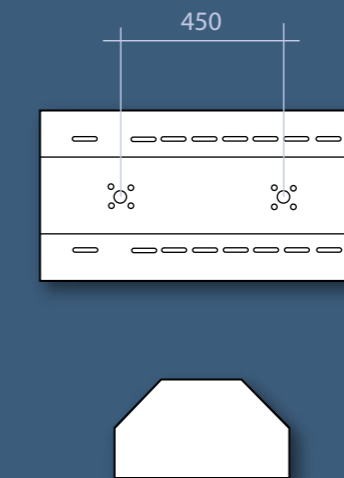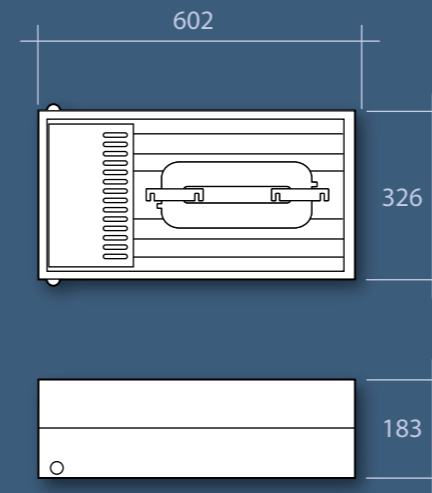

Lamp Options



END: Endura

Standard Features

- Certified ingress protection to IP20
- Massive 60,000 hours lamp life guaranteed
- Flicker free instant start
- Hot re-strike
- Light weight high efficiency electronic control gear
- High purity anodised aluminium specular reflector for maximum efficiency
- Supplied with easy fix back plate with plug and socket power connection
- Heavy grade epoxy powder coated corrosion resistant body

To order Accessories

(Add suffix to order code)

/WG: Protective wire guard

/DIFF: Impact resistant polycarbonate drop dish

/LOUVRE: White louvre assembly for glare control

For more accessories see page 94


Specification Guide

Order Code	Watt	Kg	Lamp
ECLB100END	100	6.0	END
ECLB150END	150	7.5	END

Example order code:

ECLB150END/DD – A 150 watt Endura low bay luminaire with an impact resistant polycarbonate drop dish diffuser.

Photometry

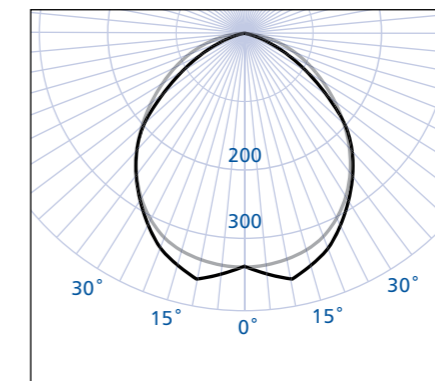

ECLB150END