



For use in demanding applications, both commercial and industrial, manufactured with durable materials giving a 'fit and forget' service life.

Energy saving is combined with an extended lamp life.

Product Specification

- Ultimate LED reliability, premium brand with high power output
- High strength die cast aluminium IP65 body and toughened glass cover
- Fully adjustable metal stirrup for ease of installation
- Body is grey colour RAL7004
- LED mounted on metal heatsink with separate driver
- 50,000 hours L70 lifespan
- Cool white (4500k) as standard
- 120° beam angle
- Gland entry point prewired with 2 metres 3 core flexible cable
- Certified ingress protection to IP65
- Voltage AC100 – 265V
- Operating temperature: -30°C to +55° C
- 3 year warranty

Optional Features


- Can be switched by a Photocell or Intelligent controls

Applications

- Remote locations
- Exterior lighting
- Car parks
- Security and General access
- Sports facilities
- Amenity lighting
- Feature lighting
- Marine floodlighting

Order Code	Wattage	Colour Temp	Lumens	IP Rating	Beam Angle	Lifetime Hours	Width (mm)	Height (mm)	Depth (mm)	Weight (kg)
LCFL30W	30	4500k	2850	IP65	120	50,000	220	320	80	2.0
LCFL50W	50	4500k	4750	IP65	120	50,000	295	340	105	3.4
LCFL80W	80	4500k	7600	IP65	120	50,000	250	310	95	4.3
LCFL120W	120	4500k	11400	IP65	120	50,000	335	390	115	7.8
LCFL200W	200	4500k	19000	IP65	120	50,000	420	490	130	14.0
LCFL240W	240	4500k	22800	IP65	120	50,000	420	490	130	14.0

All dimensions shown are in millimetres

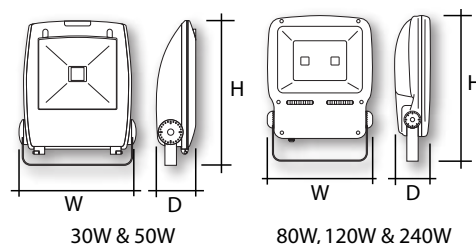

Wirefield Limited

Unit 1, Matrix Park, Talbot Road, Segensworth, Fareham, Hampshire PO15 5AP

Tel: 0844 847 5100 Fax: 0844 847 5101

Web: www.wirefield.co.uk Email: sales@wirefield.co.uk