

# LUNIS IP20

MINI HIGH BAY


For decorative commercial and retail application

High efficiency, stylish compact high bay luminaire, incorporating either metal halide, high pressure sodium, or mercury discharge lamp with power ratings ranging from 70 to 150 watts.

**Available in two versions:**

1. Stylish polycarbonate refractor with protective glass.
2. High purity machine spun anodised aluminium reflector.


Designed and manufactured to comply with EN 60598 and are CE certified.

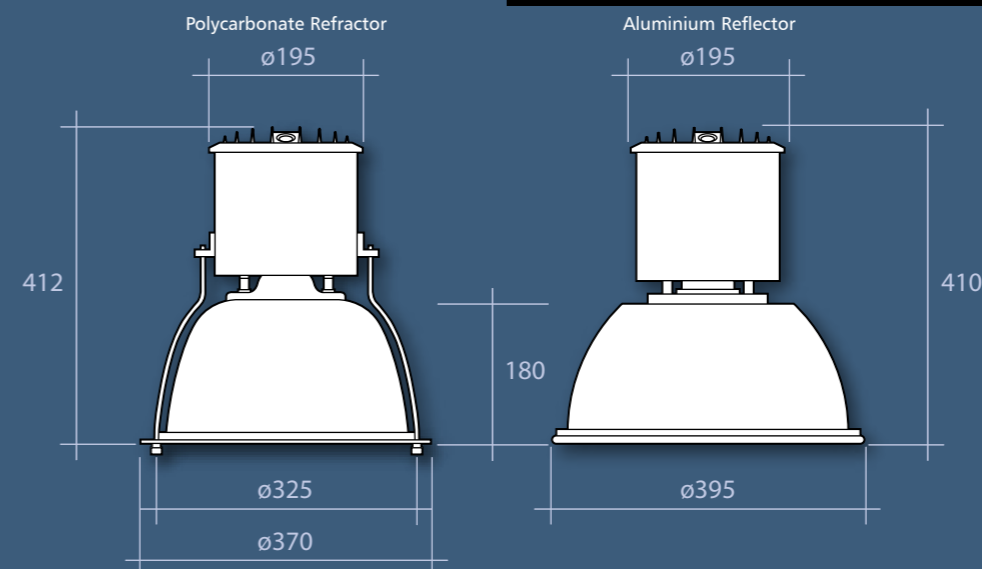

**Lamp Options**



SI: Elliptical Diffuse High Pressure Sodium with Integral Ignitor



Q/P: Elliptical Metal Halide – Protected



M: Elliptical Diffuse Mercury



**Standard Features**

- Certified ingress protection to IP20
- Choice of metal halide, high pressure sodium, or mercury lamp included
- Eye catching stylish design
- Choice of either polycarbonate refractor with protective glass or aluminium reflector
- Special drop down gear tray aids speedy installation and maintenance
- Quality sub components for a long service life

**To order Features**

(Add suffix to order code)

**/TI:** Timed ignitor to prevent lamp cycling

**/FTB:** Fused terminal block

**Accessories**

**/GLASS:** Toughened front glass (standard with polycarbonate refractor)

**For Accessories please see page 95**

**Specification Guide**

**Polycarbonate with protective glass**

Order Code	Watt	Kg	Lamp
LUN70S/PRIS	70	6.7	SI
LUN70Q/PRIS	70	6.7	Q/P
LUN150Q/PRIS	150	7.9	Q/P
LUN80M/PRIS	80	7.0	M
LUN125M/PRIS	125	7.0	M

**Aluminium Reflector**

Order Code	Watt	Kg	Type
LUN70S/ALL	70	6.0	SI
LUN70Q/ALL	70	6.0	Q/P
LUN150Q/ALL	150	7.2	Q/P
LUN80M/ALL	80	6.3	M
LUN125M/ALL	125	6.3	M

Example order code:  
LUN150Q/PRIS/FTB – A 150 watt metal halide mini high bay luminaire fitted with a fused terminal block, refractor, protective glass and lamp.



**Applications:**

- Reception areas
- Atriums
- Shopping centres
- Lower level commercial installations
- Retail stores