

LOW ENERGY



5200K  
COOL WHITE



5 YEAR\*  
WARRANTY



IP66



IK08



CRI



OP. TEMP  
-30°C  
to  
+40°C



VOLTAGE  
AC110 - 240V




SLB20250/SLB27000




SLB13500



SLB32400/SLB40500

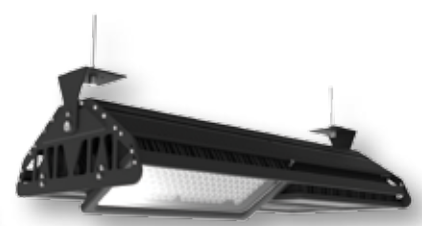

SLB54000 - Coming soon

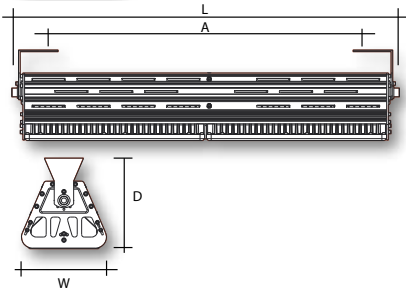

- LED modules adjustable by up to 30°.
- IP66 construction - suitable for harsh environments.
- Branded driver and LED chips with outputs up to 54000 lumens.
- Suitable for suspension or surface mounting.
- Available with **EyeWi** wireless controls.

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	A (mm)	Weight (kg)
SLB13500	100	12800	127	367	153	163	272	7.5
SLB20250	150	20250	135	675	153	163	604	7.5
SLB27000	200	24113	120	675	153	163	604	7.5
SLB32400	240	32400	135	1024	153	163	928	11
SLB40500	300	37912	126	1024	153	163	928	11

**Optional Features** (add suffix to order code)

/HMS: On/Off integral microwave sensor

/MSDIM: Dimmable sensor