


SOLENT 1 IP65

COMPACT ALUMINIUM FLOODLIGHT

For general area lighting

High efficiency compact floodlight incorporating either 70 or 150 watt metal halide or high pressure sodium lamps.

Designed and manufactured to comply with EN 60598 and is CE certified.

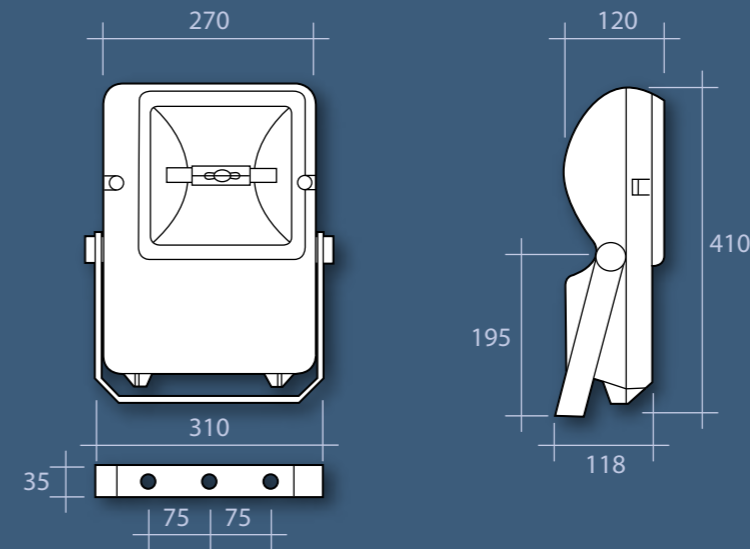

Lamp Options



SI: Elliptical Diffuse High Pressure Sodium with Integral Ignitor



QDE: Linear Metal Halide



Applications:

- Security and general access
- Smaller architectural features
- Amenity lighting
- Roadway lighting
- Feature illumination
- Temporary site lighting

Standard Features

- Certified ingress protection to IP65
- Choice of metal halide or high pressure sodium lamp included
- Highly durable die cast aluminium body
- Epoxy powder coated black for corrosion resistance
- High purity symmetric reflector for improved efficiency
- Quality integral control gear for trouble free use
- Wired with high temperature silicone insulated cable for maximum heat resistance
- Hinged drop down front panel for ease of maintenance
- Captive fixings and rugged construction for a long service life
- Adjustable stirrup for maximum flexibility in mounting
- All gaskets are manufactured from heat resistant silicone rubber to ensure the IP65 rating
- **Windage guide = 0.11m²**

To Order Features

(Add suffix to order code)

/TI: Timed ignitor to prevent lamp cycling (240v product only)

/FTB: Fused terminal block

/PEC: Dusk to dawn sensing photo-electric cell (not available on TMP70S/LV)


Accessories

/WG: Wire guard for improved protection

For fixing brackets see pages 72/73

Floodlight poles and furniture can be found on pages 108/109

Photometry

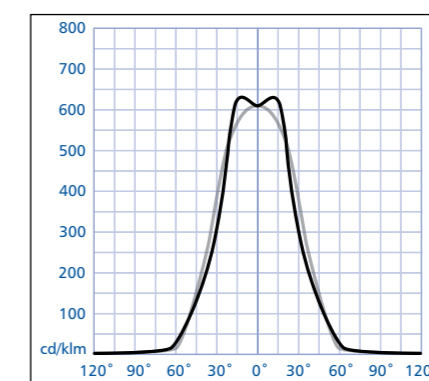

TMP70Q

Specification Guide

Order Code	Watt	Kg	Lamp
TMP70S	70	5.6	SI
TMP70Q	70	5.5	QDE
TMP150Q	150	6.5	QDE
TMP70S/LV*	70	7.6	SI
TMP150Q/LV*	150	8.0	QDE

* Please note supply voltage 110.

Example order code:
TMP70S/PEC – A 70 watt high pressure sodium floodlight with an IP65 aluminium body, photo-electric cell and complete with lamp.