

# wirefield SPACER SLIM

**50,000 hrs**  
**L80/B50**

**WALLPACK**



## Technical Specification

- Die cast aluminium back body and polycarbonate front.
- Surface mount with side cable entry as standard.
- Opal diffuser to minimise glare.
- IP65.
- IK08.
- Integral emergency available

## Features


Wattage	20w to 30w
Lumens per Watt	Up to 79
CRI	80
L**B**	50,000 hours L80 B50
Driver	Fixed Output
Controls	PEC / Microwave
Colour Temperature	4000k
Temperature Rating	-20°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR AMENITY APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SWP20/4K*	20	1344	220 x 190 x 88	1.0
SWP30/4K	30	2360	310 x 265 x 118	2.1

\*INTEGRAL MICROWAVE, EMERGENCY AND PEC NOT AVAILABLE

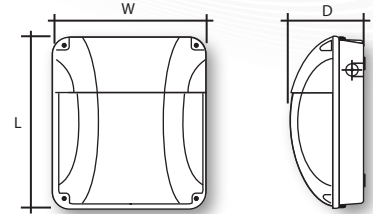

## Control Options

### Driver Options:

Fixed Output

### Sensor Options:

PEC

Microwave (SWP30 only)

## Emergency Options

### Emergency Options:

3hr Integral Maintained (SWP30 only)

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR AMENITY APPLICATIONS*