


For use in applications where downlighters are the only practical option but you would like to do something a little different. The trimless o-ring adds a touch of class to small areas which are in need of a visual lift. The Circu-LED design manages the brightness from a potentially dark ceiling, via a gentle gradient, into a central opalescent disk. Soft-spots use the principles of brightness management again to move from a low brightness ceiling through an opalescent background and on to the power of tight beamed AR111 or CDM light sources.



## Lamp Options

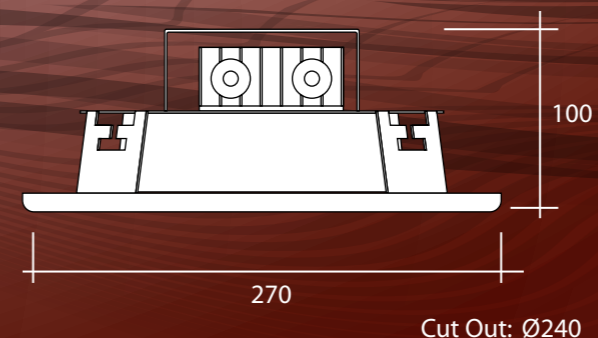

LED: Light Emitting Diode

## Product Specification

- Certified ingress protection to IP20
- Available with active or passive cooling
- Standard satin white finish
- 50,000 hour lamp life
- Clips and glass
- Aluminium housing
- Integral heat sink
- 3,000k CRI Ra 80

## Optional Features

(Add suffix to order code)

**/FGC:** Frosted glass cover

**/FGR:** Frosted glass ring

Please note the standard cut out size is 240mm, however, it can be supplied for a cut out between 185 to 240mm. Please contact the sale office when ordering.

## Order Codes (must include a Suffix from Optional Features for glass type)

Including Lamps

Order Code	Lumens	Cooling	Lamp
FORLED118/PC	1100	Passive	LED
FORLED118/AC	1100	Active	LED
FORLED130/AC	2000	Active	LED
FORLED149/AC	3000	Active	LED

Example order code:

**FORLED118/PC/FGC** – A 1100 lumen Circu-LED passive cooling downlight with frosted glass cover.



## Applications:

- Corridor Lighting
- Hotel Reception
- Meeting Rooms
- Board Rooms