


COM65



- Double diffused giving an evenly distributed light output with no glare.
- High strength polycarbonate IP65 body and diffuser with poured rubber seal.
- One piece stainless steel clips fitted as standard. Gland entry points at both ends and on the back of the body.
- LED's are mounted on a metal heat-sink with a separate driver.
- Available with **EyeWi** wireless controls.

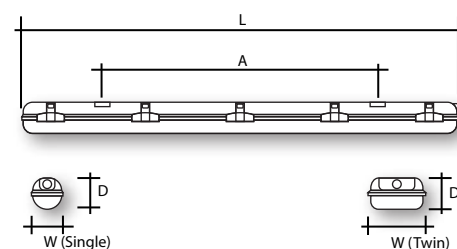

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	A (mm)	Weight (kg)
CPB415K	24	2665	107	1270	94	98	800	1.7
CPB515K	40	4652	121	1565	94	98	940	2.3
CPB615K	48	5311	107	1840	94	98	940	2.9
CPB425K	2x24	5327	110	1270	138	98	800	2.3
CPB525K	2x40	8900	118	1565	138	98	940	2.9
CPB625K	2x48	10676	112	1840	138	98	940	4.0

Optional Features (add suffix to order code)

/M3: 3hr integral emergency

/HP52SW: End mount PIR for On/Off switching

/FP52SW: End mount PIR for 100%/10% switching

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.