



# COM65 T5



Lamps not included

- Polycarbonate body and diffuser with poured rubber seal.
- High frequency control gear as standard.
- Gland entry points at both ends and on the back of the body.
- Powder coated metal gear tray.
- One part plastic clips supplied as standard.
- Ultimate cost effective solution.

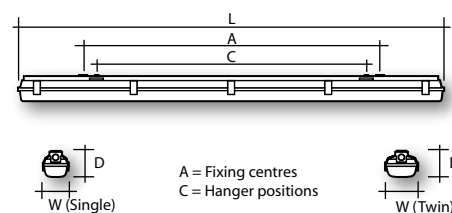

Code	Watts	L (mm)	W (mm)	D (mm)	A (mm)	C (mm)	Weight (kg)
BAS128	1x28	1207	85	81	1054	900	2.5
BAS154	1x54	1207	85	81	1054	900	2.5
BAS135	1x35	1508	85	81	1353	900	3.2
BAS149	1x49	1508	85	81	1353	900	3.2
BAS228	2x28	1207	103	81	1054	900	4.0
BAS254	2x54	1207	103	81	1054	900	4.0
BAS235	2x35	1508	103	81	1353	900	5.3
BAS249	2x49	1508	103	81	1353	900	5.3

**Optional Features** (add suffix to order code)

/M3: 3hr integral emergency

/SSCLIP: Stainless steel diffuser retention clips

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.

# COM65 T8

36W-140W  
T8



1 YEAR\*  
WARRANTY



IP65



IK08



OP. TEMP




VOLTAGE  
AC220 - 240V



Lamps not included

INDUSTRIAL LIGHTING



A = Fixing centres  
C = Hanger positions



- Polycarbonate body and diffuser with poured rubber seal.
- High frequency control gear as standard.
- Gland entry points at both ends and on the back of the body.
- Powder coated metal gear tray.
- One part plastic clips supplied as standard.
- Ultimate cost effective solution.

Code	Watts	L (mm)	W (mm)	D (mm)	A (mm)	C (mm)	Weight (kg)
BAS136/HF	1x36	1258	90	93	880	798	2.5
BAS158/HF	1x58	1561	90	93	1520	938	3.2
BAS170/HF	1x70	1830	90	93	1698	1016	3.9
BAS236/HF	2x36	1258	135	93	880	798	4.0
BAS258/HF	2x58	1561	135	93	1520	938	5.3
BAS270/HF	2x70	1830	135	93	1698	1016	6.8

**Optional Features** (add suffix to order code)

/M3: 3hr integral emergency

/SSCLIP: Stainless steel diffuser retention clips

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.