


COMSITE LINEAR 110V

Solutions Site Lighting



- A flexible product -110V and 240V using the same driver.
- High strength polycarbonate body and diffuser with poured rubber seal.
- One piece stainless steel clips fitted as standard.
- Gear tray suspension clips and push terminal block.

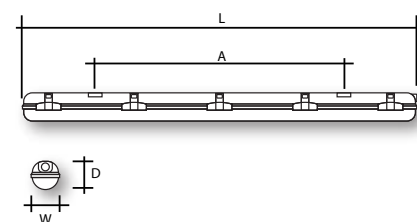

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	A (mm)	Weight (kg)
SPB2230/110V	2x15	2366	79	635	103	77	400	1.0
SPB5140/110V	1x40	3720	91	1532	85	77	950	1.6

Optional Features (add suffix to order code)

/M3: 3hr integral emergency

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.