




Robust metal body luminaire painted white complete with opal polycarbonate diffuser.

Designed and manufactured to comply with EN 60598 and are CE certified.

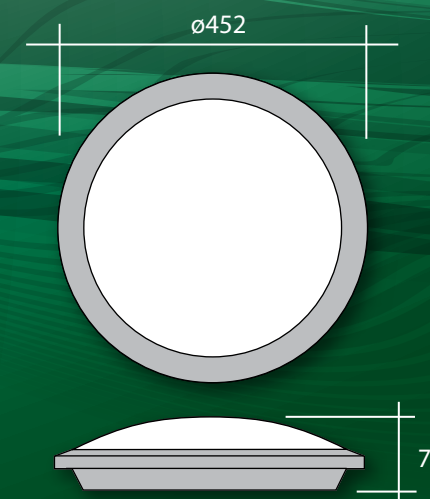

### Lamp Options



T5C: Circular

### Product Specification:

- Certified ingress protection to IP20
- Powder coated after manufacture
- Operates at 100% when presence is detected and afterwards for an adjustable delay then at 10%. Bright-out facility so that luminaire can be set to stay at 10% when sufficient daylight is available
- Master/Slave Wiring: A mixture of sensor and non-sensor luminaires can be connected together so that the whole run operates in unison based on presence on any one or more sensors
- An ECA compliance calculator is available on our website to verify compliance of this or any other luminaire with the latest ECA standard

### Intelligent Options

(Add suffix to order code)

**/FM21:** Microwave with 10% on standby

**/FSLV:** Slave luminaire for use with /FM21 master luminaire and optional remote sensors

### Optional Features

(Add suffix to order code)

**/CP:** Clear Prismatic Diffuser Option


### Order Codes (must include a Suffix from the Intelligent Options)

Including Lamps

Order Code	Watt	Lamp
ID22	22	T5C
ID40	40	T5C
ID55*	55	T5C

\* Integral emergency not available for 55 watt.

Example order code:  
**ID55/FM21/M3** - A 1 x 55W T5C White Circular luminaire with 3hr emergency pack which dims between 10% and 100% depending on presence and daylight detected by integral microwave. Supplied complete with lamp.

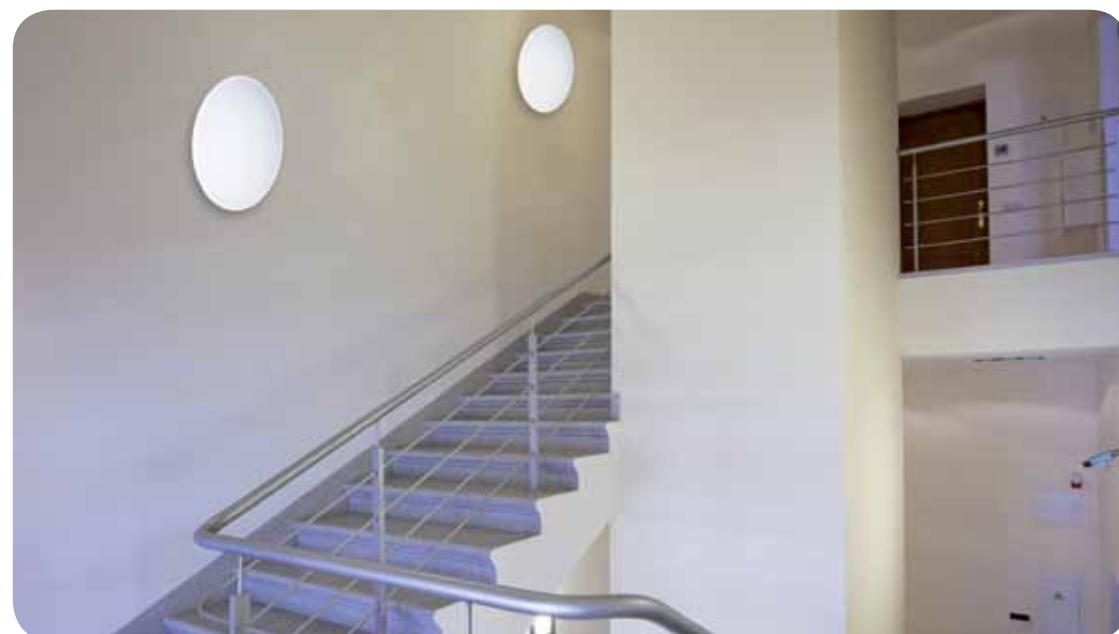

### Applications:

- Stairwells
- Corridors
- Receptions
- Toilets

### Intelligent Options

Our technical team can help you to design a practical solution for your specific needs. Please contact us so that we can assist you to consider the best options from our full range of lighting controls.

### Gear options

- /M3:** 3hr Emergency
- /S3:** Self Test Emergency