



wirefield FACULTY

50,000 hrs
L80/B10

SURFACE LINEAR



Ultra modern curved profile
Shown with LED emergency indicator

Technical Specification

- Steel powder coated body with opal polycarbonate diffuser.
- Surface mount as standard and can be suspended.
- Gear cover for uniform light distribution and delivery.
- IP40 from below and IP20 from above.
- Integral emergency available.


Features

Wattage	20w to 80w
Lumens per Watt	Up to 102
CRI	80
L**B**	50,000 hours L80 B10
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / Microwave
Colour Temperature	4000k
Temperature Rating	-20°C to +30°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	A** (mm)	Weight (kg)
SSL204A	20	2090	1184 x 208 x 70	1066	3.9
SSL404A	40	4180	1184 x 208 x 70	1066	4.0
SSL305A	30	3135	1484 x 208 x 70	1366	4.2
SSL605A	60	6270	1484 x 208 x 70	1366	4.4
SSL406A	40	4180	1784 x 208 x 70	1666	4.5
SSL806A	80	8360	1784 x 208 x 70	1666	4.7

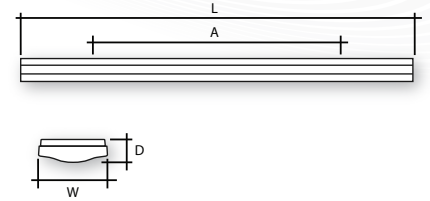

** These dimensions are used for the suspension kits

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

Sensor Options:

PIR

Microwave

Accessories

Optional Accessories:

3m Suspension Kit

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS