



wirefield  
HCFLLED

60,000 hrs  
L80/B10

IP67 LED  
Floodlight



Technical Specification

- Surface mounted.
- Direct light distribution.
- Polycarbonate lens.
- Anodized aluminium body,.
- IP67.
- IK08.
- 90 Deg Beam Angle
- suitable for use in high corrosive environments, swimming pools, coastal and offshore.


Features

Wattage	110w to 190w
Lumens per Watt	Up to 148
CRI	80 +
L**B**	60,000 hours L80 B10
Driver	Fixed output
Colour Temperature	4000k
Temperature Rating	-40°C to +40°C

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS

## Product Specification

Code	Watts	Delivered lumens	CCT	CRI	L x W x D (mm)	Weight (kg)
HCFLD110	110	16200	4000K	80+	274 x 300 x 325	4.3
HCFLD140	140	19050	4000K	80+	274 x 300 x 325	4.3
HCFLD165	165	22750	4000K	80+	354 x 300 x 325	5.17
HCFLD190	190	25200	4000K	80+	354 x 300 x 325	5.17

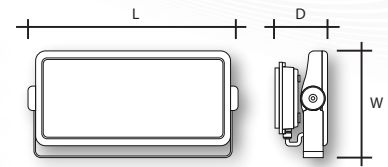

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS*