



The first of its kind, the LED High Bay luminaire was designed specifically to replace conventional lighting in a wide variety of industrial applications, both indoor and outdoor IP66 rated.

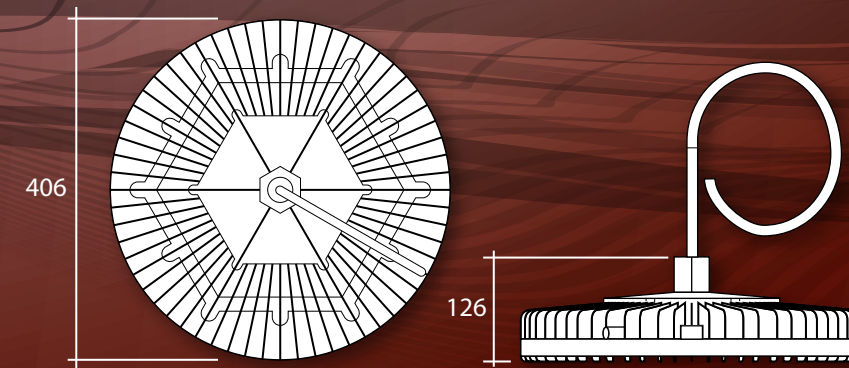

Lamp Options

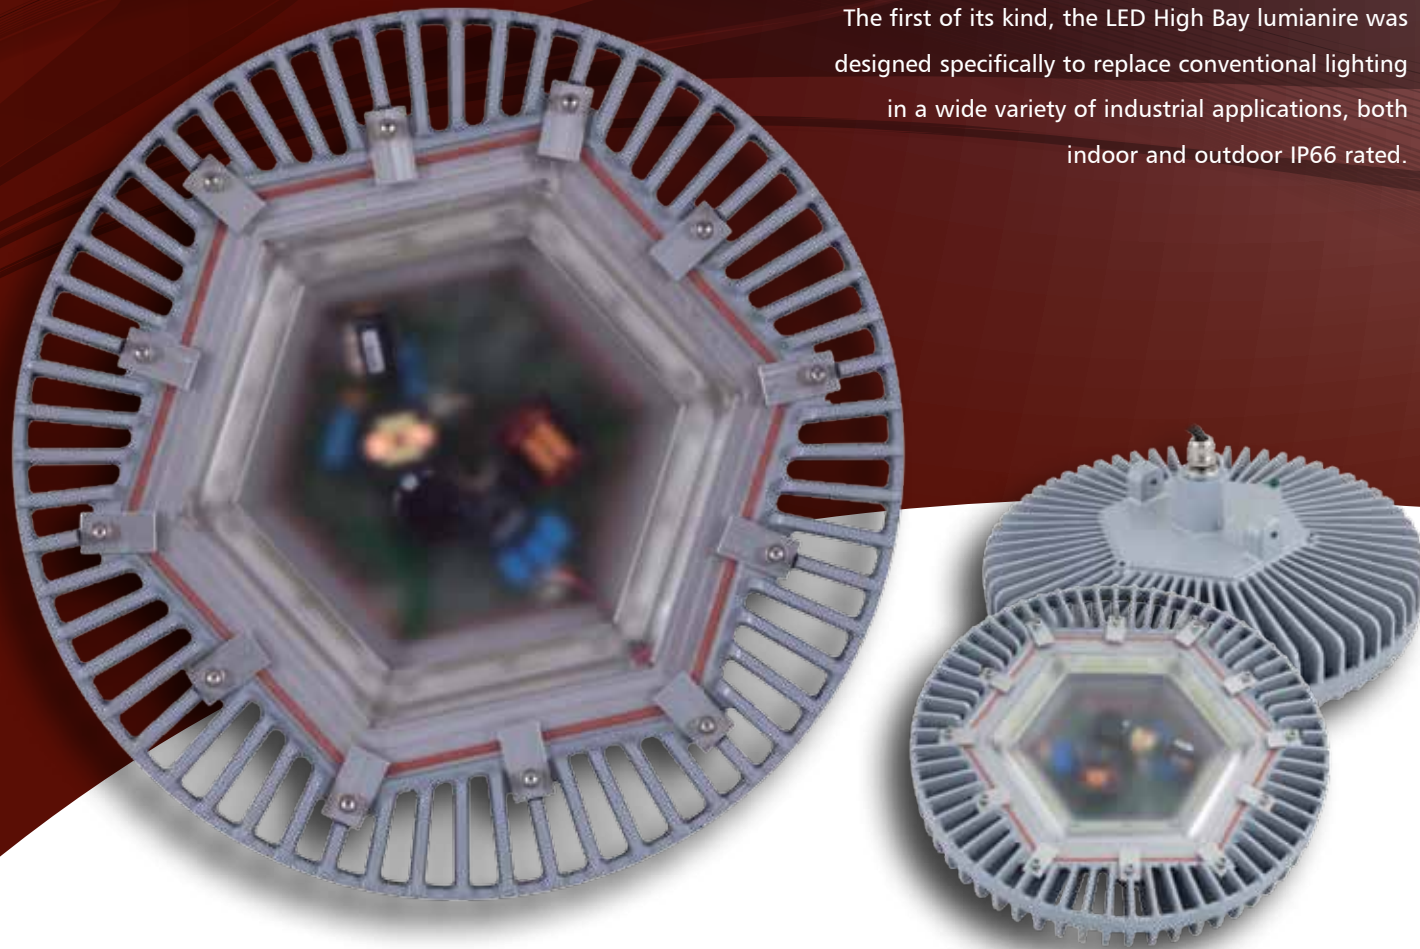

LED: Light Emitting Diode

Product Specification

- Certified ingress protection to IP65
- Equivalent to 250W HID lamp
- Low power consumption. 70 plus luminaire lumens per circuit watt.
- Instant on/off operation
- Universal input (100-277 VAC), 50/60Hz
- Superior colour rendition index compared to HPS, LPS & MV
- Mercury free
- Resistant to shock and vibration
- Temperature compensation technology for longer life
- >80% lumen maintenance after 60,000 operating hours
- Copper free aluminium

Optional Features

(Add suffix to order code)

/HBXW2: Sirup, cable gland and cable

/HBXCG: Cable gland and 3m cable

/SD50: 50% dimming

/FSLV: Slave luminaire

Order Codes

Including Lamps

Order Code	Watt	Kg	Lamp
I-BAYLED106/6k	106	7.7	LED

Example order code:
I-BAYLED106/6k – A 106 watt LED High Bay clear acrylic narrow circular luminaire. 150 watt input power. 6k colour temperature.



Applications:

- Warehouses
- Garage Lighting
- Cold Stores
- Tunnel and general area lighting

Intelligent Options

Our technical team can help you to design a practical solution for your specific needs. Please contact us so that we can assist you to consider the best options from our full range of lighting controls.

