

High efficiency, stylish compact high bay luminaire, incorporating either metal halide or high pressure sodium lamp with power ratings ranging from 42 to 150 watts.

Designed and manufactured to comply with EN 60598 and are CE certified.




1



2

Available in two versions:

1. Stylish polycarbonate refractor with protective glass.
2. High purity machine spun anodised aluminium reflector.

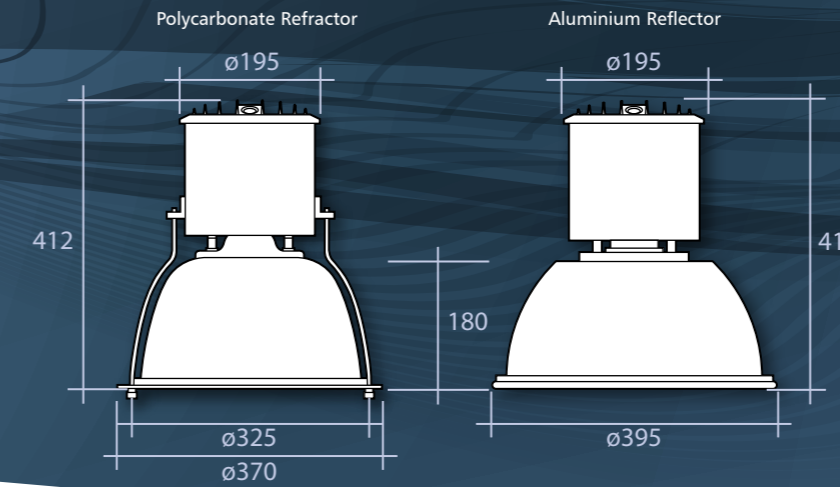

Product Specification

- Certified ingress protection to IP20
- Supplied as standard with timed ignitor to prevent lamp cycling
- Choice of metal halide, compact fluorescent or high pressure sodium lamp included
- Eye catching stylish design
- Choice of either polycarbonate refractor with protective glass or aluminium reflector
- Special drop down gear tray aids speedy installation and maintenance
- Quality sub components for a long service life

Optional Features

(Add suffix to order code)

/FTB: Fused terminal block


Optional Accessories

/WG: Protective wire guard

/GLASS: Toughened front glass (standard with polycarbonate refractor)

For a description and image of these accessories please see page 93

Lamp Options



QP: Elliptical Metal Halide – Protected



SI/SE: Elliptical Diffuse High Pressure Sodium
SI = Internal Ignitor SE = External Ignitor



TC-T: Compact Fluorescent

Order Codes

Including Lamps

Polycarbonate with protective glass

Order Code	Watt	Kg	Lamp
LUN142PL/PRIS	42	5.7	TC-T
LUN70S/PRIS	70	6.7	SI
LUN70QP/PRIS	70	6.7	QP
LUN150QP/PRIS	150	7.9	QP

Aluminium Reflector

Order Code	Watt	Kg	Type
LUN142PL/ALL	42	5.0	TC-T
LUN70S/ALL	70	6.0	SI
LUN70QP/ALL	70	6.0	QP
LUN150QP/ALL	150	7.2	QP

Example order code:

LUN150QP/PRIS/FTB – A 150 watt metal halide compact high bay luminaire fitted with a fused terminal block, polycarbonate refractor and protective glass. Supplied complete with lamp.



Applications:

- Reception areas
- Atriums
- Shopping centres
- Lower level commercial installations
- Retail stores