


An architectural high efficiency lantern
with an IP65 lamp compartment
incorporating either metal
halide or high pressure
sodium discharge lamps.

Designed and manufactured to comply with EN 60598-1 and are CE certified.



Lamp Options

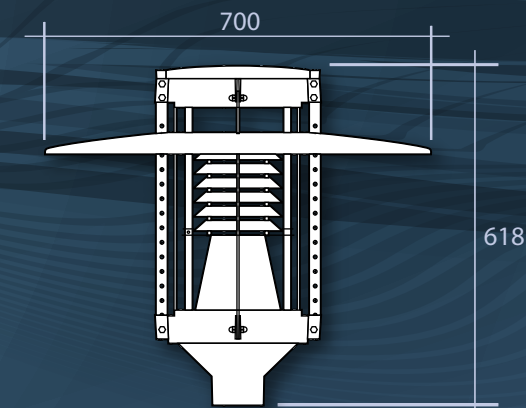

S: High Pressure Sodium



QP: Elliptical Metal Halide – Protected




Applications:

- Pathways
- Shopping precincts
- Parks and recreational areas
- Amenity

Hot dipped galvanised Parallel Sided Poles with access door

Order Code	Root Mnt	Flange Mnt	H (m)	L (m)	PD (m)	Kg
	COL4RM76	COL4FM76	4	4.8	0.8	30
	COL5RM76	COL5FM76	5	5.5	0.8	37
	COL6RM76	COL6FM76	6	6.7	1.0	45

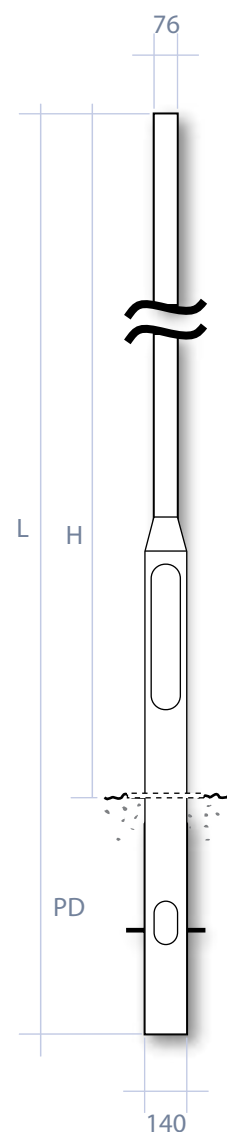

Standard Features

- Certified ingress protection to IP65
- Body, cover and spigot fixing is diecast aluminium alloy coated in grey (RAL 9007)
- Canopy is finished with polyester powdercoat (interior white RAL 9010, exterior grey RAL 9007)
- Spigot fixing is suitable for 76mm pole diameter
- Gear tray is galvanized steel for class I and polycarbonate for class II
- Screws are stainless steel AISI 304
- Gaskets are antiageing, tropicalised and weather resistant silicon
- Lampholder sockets are E27 or E40
- Electrical installation is class I or Class II
- For photometry details refer to Page 218 graph ref PC045
- **Windage guide - 0.163m²**

To Order Features

(Add suffix to order code)

/60: 60mm pole option

Order Codes

Including Lamps

Order Code	Watt	Kg	Lamp
PLZ70S	70	11.5	S
PLZ100S	100	11.5	S
PLZ150S	150	12.3	S
PLZ70QP	70	11.5	QP
PLZ100QP	100	11.5	QP
PLZ150QP	150	12.3	QP

Example order code:

PLZ100QP – A 100 watt metal halide IP65 lantern for 76mm pole. Supplied complete with lamp.