



wirefield PNL

50,000 hrs
L70/B50

RECESSED PANEL



Technical Specification

- White slimline aluminium frame.
- UGR <22 opal diffuser.
- UGR <19 micro-prismatic diffuser option available.
- 600 x 600 and 1200 x 300 option.
- Suitable for 15mm & 24mm T-Bar ceiling.
- IP40.
- IK02.


Features

Wattage	36w
Lumens per Watt	Up to 101
CRI	80+
L**B**	50,000 hours L70 B50
Driver	Fixed Output / Switch Dim / Dali
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	CCT	Weight (kg)
PNL1363K	36	3600	595 x 595 x 33	3000	1.8
PNL1363K	36	3600	1195 x 295 x 33	3000	1.8
PNL1364K	36	3650	595 x 595 x 33	4000	1.8
PNL1364K	36	3650	1195 x 295 x 33	4000	1.8
PNL1363KAUGR	36	3600	595 x 595 x 33	3000	1.8
PNL1363KBUGR	36	3600	1195 x 295 x 33	3000	1.8
PNL1364KAUGR	36	3650	595 x 595 x 33	4000	1.8
PNL1364KBUGR	36	3650	1195 x 295 x 33	4000	1.8

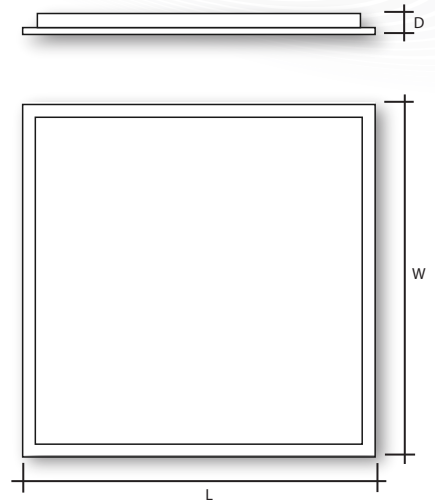

Control Options

Driver Options:

Fixed Output

Switch Dim

DALI

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Emergency

3hr Self Test Emergency

3hr DALI Interface Emergency

Accessories

Optional Accessories:

Surface Mounting Frame

Plasterboard Recess Mounting Frame

Suspension Kit

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS