Highly durable light weight Polycarbonate task light which has the benefit of high frequency 110 volt control gear and 2D fluorescent lamp, offering reisitance to impact and the adverse affect of moisture, dirt and dust.

> Designed and manufactured to comply with EN 60598 and are CE certified.




- Certified ingress protection to IP44
- UV stabilised impact resistant polycarbonate body and diffuser
- Light weight body incorporates high frequency electronic control gear
- 110 volt control gear (240 volt available)
- · Pre-wired with 5 metres of cable with the appropriate plug fitted
- Modern tooling ensures precision mouldings for a perfect construction every time

To order Features: (Add suffix to order code)

/MV: 240 volt

PHL28 110 volt



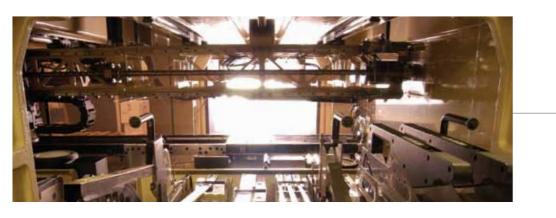

CE

Applications:

- Building sites
- 110 volt working areas
- Industrial task lighting


Ambient temperature guidance

High frequency

-25°C - +30°C

POLYTASK IP44

A polycarbonate lightweight hand lamp



Specification Guide

2D Lamp

Order Code	Watt	Lamp	Kg
PHL28	28	2D	1.4

Example order code:

PHL28/MV- A 28 watt 2D 240 volt corrosion resistant IP44 hand lamp with high frequency control gear, polycarbonate body and diffuser, with lamp.

/YELL: Yellow body. Only available on