


IP 65 Surface mounted luminaire constructed of die cast aluminium housing and front ring cover with UV stabilised polycarbonate vandal resistant diffuser.

Available in Black Finish and Aluminium Finish.

Designed and manufactured to comply with EN 60598 and are CE certified.

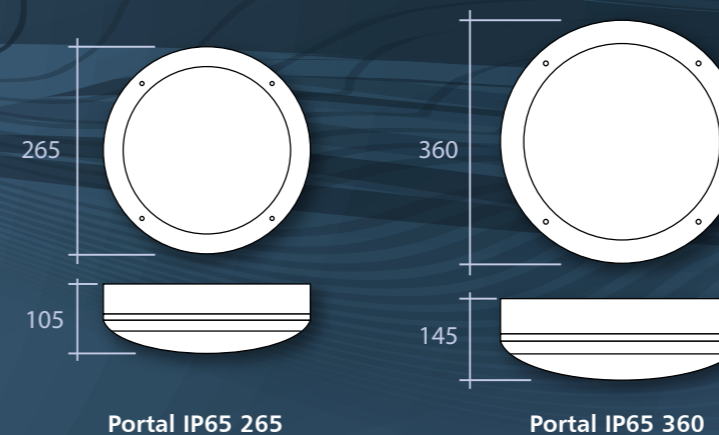

Product Specification

- Certified ingress protection to IP65
- High frequency control gear supplied as standard
- Powder coated black as standard
- Die cast aluminium construction
- Opal UV stabilised polycarbonate diffuser

Optional Features

(Add suffix to order code)

/AL: Aluminium finish

/PEC: Dusk to dawn sensing photo-electric cell

Lamp Options



2D: 2D Compact Fluorescent



T5C: Circular



TC-D: Compact Fluorescent

Order Codes

Including Lamps

Portal IP65 265

Order Code	Watt	Lamp
POR16/265	16	2D
POR18/265	18	TC-D

Portal IP65 360

Order Code	Watt	Lamp
POR22/360	22	T5C
POR28/360	28	2D
POR38/360	38	2D
POR40/360	40	T5C
POR55/360*	55	2D

* Integral emergency not available for 55 watt.

Example order code:

POR22/360/E3 – A 22 watt T5-C IP65 black body luminaire, 360mm diameter with high frequency control gear and integral emergency gear. Supplied complete with lamp.

Gear options

/F: 10% Standby Dimming
/D: DSI Digital Dimming

/E3: 3hr Emergency
/E3T: Self Test Emergency

Please check with sales team for compatibility



Applications:

- Schools & Universities
- Building perimeters
- Hospitals
- Under canopy application

Also available with Motion and Daylight sensors - see page 158-159