



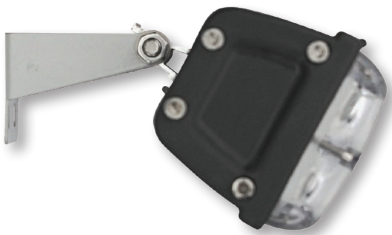

wirefield PROLED 100 EBO

100,000 hrs
L90/B10

COMPACT ARCHITECTURAL LINEAR WALL-WASH

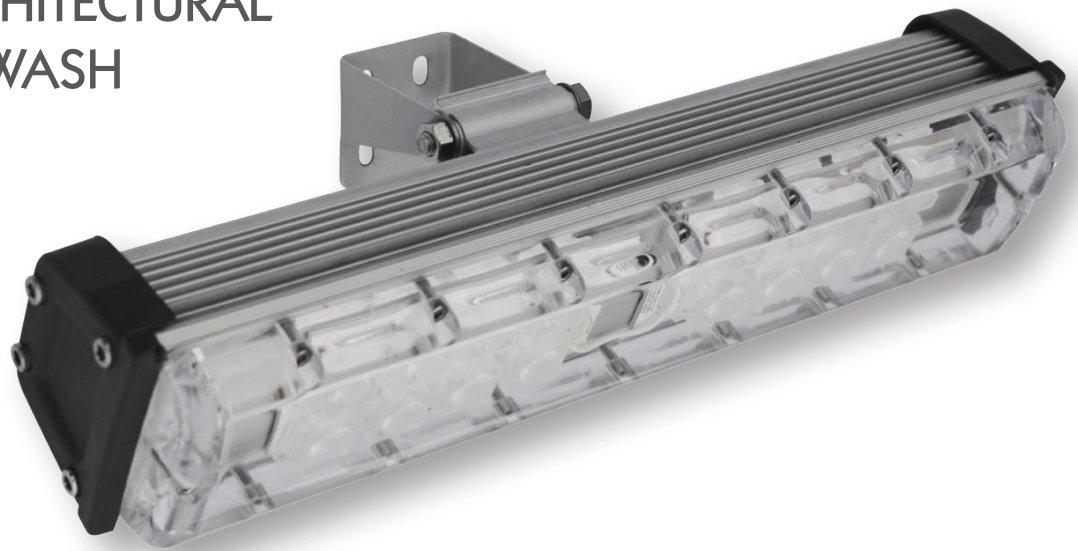

Technical Specification

- Extruded aluminium body.
- UV resistant polycarbonate diffuser.
- Choice of 6 optics.
- IP66.
- IK09.

Features

Wattage	25w
Lumens per Watt	Up to 114
CRI	70+
L**B**	100,000 hours L90 B10
Driver	Fixed Output / Dali
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C


LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS

wirefield

PROLED 100 EBO

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
EBO1254K90	25	2819	4000K	380 x 80 x 170	4.0

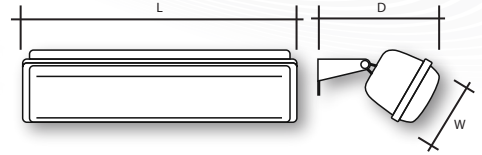

Control Options

Driver Options:

Fixed output

DALI

LED Options

Additional Options:

CCT 3000K

CCT 5000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk