




wirefield PROLED 100 HCC

100,000 hrs
L80/B50

SURFACE OR
SUSPENDED LINEAR

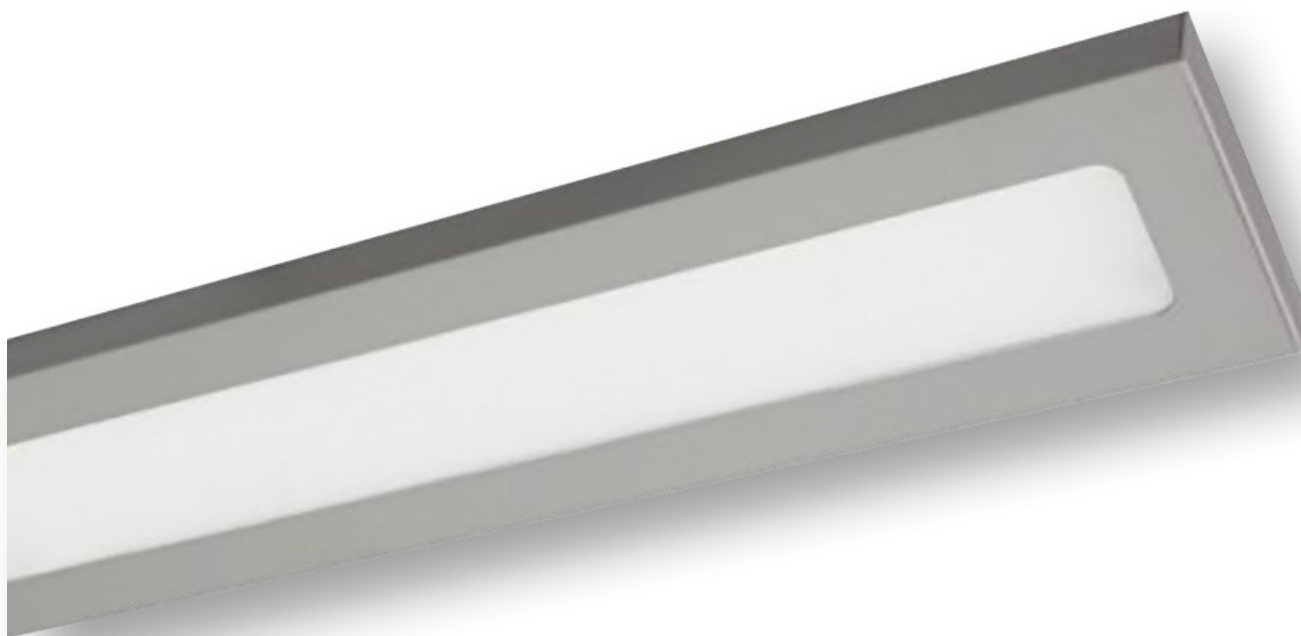

Technical Specification

- Steel body with micro prismatic diffuser.
- Available with connection accessory for continuous run.
- IP40.
- IK05.
- Integral emergency available.
- Low glare.
- RAL colour options.
- Optional Bluetooth control and tunable white.

Features

Wattage	17w to 36w
Lumens per Watt	Up to 164
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	Bluetooth / Microwave Sensor / Corridor Function / PIR / Daylight Sensor / Eye-Wi
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
HCC1184KB	17	2721	1215 x 175 x 40	4.1
HCC1264KB	22	3548	1215 x 175 x 40	4.1
HCC1384KB	29	4624	1215 x 175 x 40	4.1
HCC1234KC	21	3401	1495 x 175 x 40	5.1
HCC1324KC	27	4435	1495 x 175 x 40	5.1
HCC1484KC	36	5780	1495 x 175 x 40	5.1



Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Sensor Options:

PIR

Eye-Wi

Bluetooth

Microwave Sensor

Daylight Sensor

Corridor Function

LED Options

Additional Options:

CCT 3000K

Tunable white

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Open area and escape route lens available

Accessories

Optional Accessories:

2m Suspension Kit

Inline Connection

White Suspension Cover

Spiral, White or Clear 2 metre Power Feed

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS