



PROLED 100 HCC LG3 UGR

wirefield

100,000 hrs
L80/B50

SUSPENDED LINEAR,
UGR<19



Technical Specification

- Steel body with micro prismatic diffuser.
- Suspended - 70% down - 30% up, light distribution.
- Available with connection accessory for continuous run.
- IP40.
- IK05.
- Integral emergency available.
- UGR<19.
- RAL colour options.
- LG3 compliant.


Features

Wattage	30w to 56w
Lumens per Watt	Up to 142
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	CF / Bluetooth
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
HCC1304KBLG3/UGR	30	4129	4000	1215 x 175 x 40	4.6
HCC1504KBLG3/UGR	44	6194	4000	1215 x 175 x 40	4.6
HCC1414KCLG3/UGR	38	5300	4000	1495 x 175 x 40	5.6
HCC1664KCLG3/UGR	56	7949	4000	1495 x 175 x 40	5.6

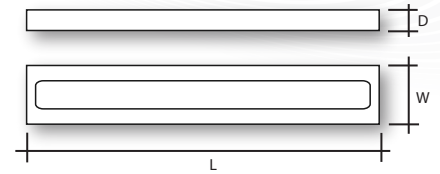

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

Sensor Options:

Corridor Function

Bluetooth Control

LED Options

Additional Options:

CCT 3000K

Tunable white 2700K - 6500K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Integral Emergency with 'Escape Route' Optic

Integral Emergency with 'Open Area' Optic

Accessories

Optional Accessories:

RAL Colour Options

Joint Pieces for Continuous Run

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS