




wirefield PROLED 100 HCS

100,000 hrs
L80/B50

**SURFACE LINEAR AND
MODULAR**

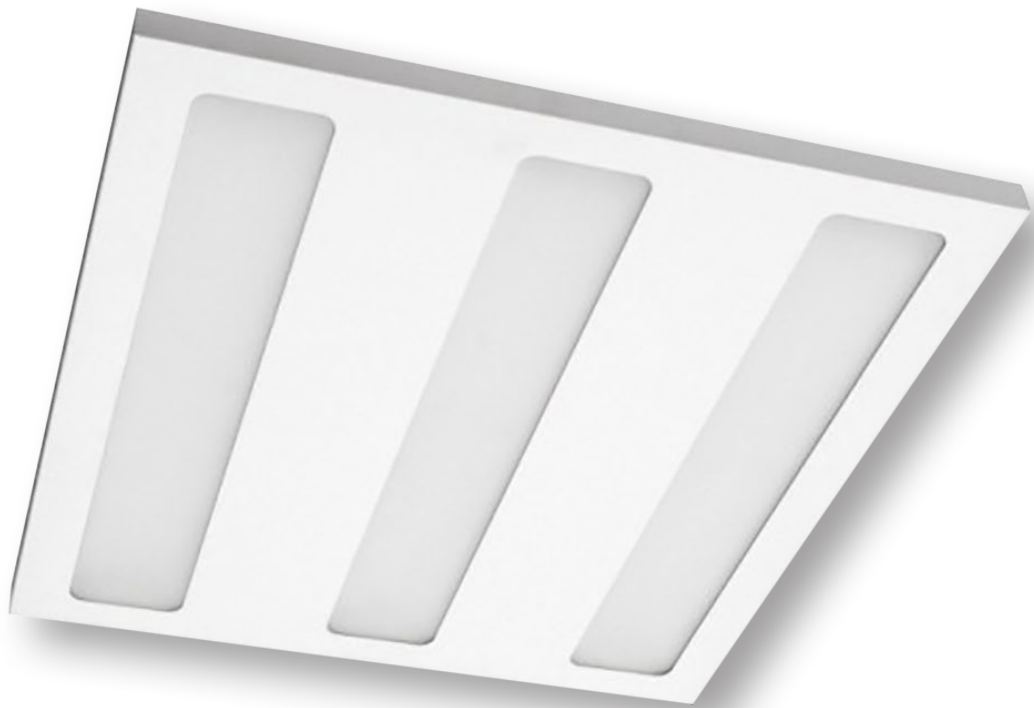

Technical Specification

- Steel body with micro prismatic diffuser.
- Surface mounting.
- IP44.
- IK05.
- Integral emergency available.
- Low glare.
- RAL colour options.
- Optional Bluetooth control and tunable white.


Features

Wattage	10w to 46w
Lumens per Watt	Up to 162
CRI	80 +
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	Microwave Sensor / Bluetooth / Integral Daylight Sensor / CF / Smart Sensor
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
HCS1114KA	10	1579	635 x 175 x 47	2.0
HCS1154KA	14	2159	635 x 175 x 47	2.0
HCS1214KA	20	2838	635 x 175 x 47	2.0
HCS1184KB	19	2879	1203 x 175 x 47	3.8
HCS1264KB	22	3754	1203 x 175 x 47	3.8
HCS1394KB	30	4893	1203 x 175 x 47	3.8
HCS1334KB	34	5457	1203 x 175 x 47	3.8
HCS1464KB	46	7570	1203 x 175 x 47	3.8
HCS1234KC	23	3599	1483 x 175 x 47	4.6
HCS1334KC	28	4693	1483 x 175 x 47	4.6
HCS1494KC	38	6116	1483 x 175 x 47	4.6
HCS1504KC	43	6822	1483 x 175 x 47	4.6
HCS1574KC	57	9463	1483 x 175 x 47	4.6
HCS2214KD	18	2879	635 x 295 x 47	3.4
HCS2314KD	28	4172	635 x 295 x 47	3.4
HCS2394KD	34	5457	635 x 295 x 47	3.4
HCS2214KE	18	2879	635 x 595 x 47	5.2
HCS2314KE	28	4172	635 x 595 x 47	5.2
HCS2394KE	34	5457	635 x 595 x 47	5.2
HCS3304KE	26	4319	635 x 595 x 47	5.4
HCS3444KE	39	5983	635 x 595 x 47	5.4

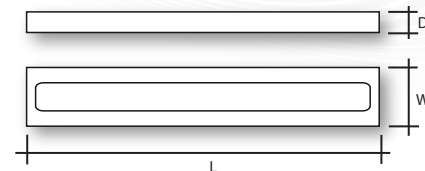

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

Sensor Options:

Microwave Sensor

Bluetooth Control

Integral Daylight Sensor

Corridor Function

Smart Sensor

LED Options

Additional Options:

CCT 3000K

Tunable white 2700K - 6500K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Integral Emergency with 'Escape Route' Optic

Integral Emergency with 'Open Area' Optic

Accessories

Optional Accessories:

RAL Colour Options

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS