



wirefield PROLED 100 HER

100,000 hrs
L80/B50

RECESSED
LINEAR OR
MODULAR



Technical Specification

- Steel body with double parabolic aluminium louvred LED modules.
- Recessed mounted into a 15mm/24mm ceiling grid or plasterboard ceiling with optional clips.
- Available in 600x300, 600x600, 1200x300 and 1200x600mm.
- IP40.
- IK05.
- Integral emergency available.
- UGR <19.


Features

Wattage	14w to 85w
Lumens per Watt	Up to 130
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / 
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
HER1144KA	14	1774	595 x 295 x 40	1.7
HER2204KB	20	2541	595 x 595 x 40	3.0
HER2294KB	29	3658	595 x 595 x 40	3.0
HER3394KB	39	4878	595 x 595 x 40	3.1
HER3434KB	43	5401	595 x 595 x 40	3.1
HER1194KC	19	2541	1195 x 295 x 40	3.0
HER1294KC	29	3658	1195 x 295 x 40	3.0
HER2584KD	58	7317	1195 x 595 x 40	6.2
HER3874KD	87	10975	1195 x 595 x 40	6.5

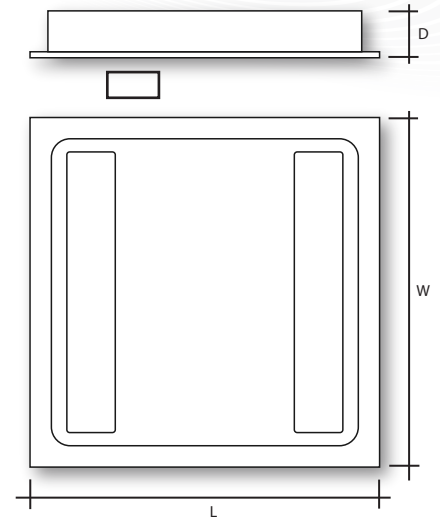

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

Sensor Options:

PIR

Microwave

Eye-Wi

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Open area and escape route lens available

Accessories

Optional Accessories:

Wide Beam Reflector

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS