



wirefield PROLED 100 HLW

100,000 hrs
L80/B50

RECESSED
MODULAR



Technical Specification

- Steel body with translucent micro-prismatic diffuser.
- Recessed mounted into a 15mm/24mm ceiling grid or plasterboard with optional kit - 500 x 500 version available.
- Unique low glare design.
- IP40.
- IK05.
- Integral emergency available.

Features


Wattage	25w & 33w
Lumens per Watt	Up to 142
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / Microwave / 
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED 100 HLW

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
HLW2293K66	25	3068	595 x 595 x 96	3.6
HLW2393K66	33	4198	595 x 595 x 96	3.6
HLW2294K66	25	3419	595 x 595 x 96	3.6
HLW2394K66	33	4678	595 x 595 x 96	3.6

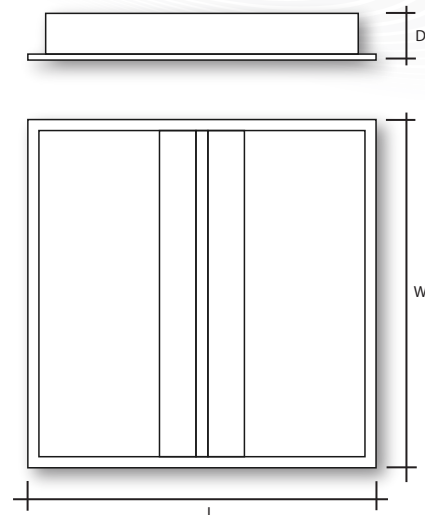

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

Sensor Options:

PIR

Microwave

Eye-Wi

LED Options

Additional Options:

CCT 3000K

Tunable white

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Accessories

Optional Accessories:

Plasterboard Mounting Frame

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk