



wirefield PROLED 100 HPF

135,000 hrs
L80/B10

HIGH POWER LED FLOODLIGHT



Technical Specification

- Surface mounted.
- Direct light distribution.
- Impact resistant tempered glass diffuser.
- Dark grey RAL7043 aluminium housing.
- IP66.
- IK08.
- Multiple beam angles available.


Features

Wattage	325w to 951w
Lumens per Watt	Up to 152
CRI	70+
L**B**	135,000 hours L80 B10
Driver	Fixed output
Colour Temperature	4000k
Temperature Rating	-40°C to +40°C

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	CRI	L x W x D (mm)	Weight (kg)
HPF3254KA90	325	47828	4000K	70+	640 x 320 x 165	15.6
HPF4034KA90	403	57636	4000K	70+	640 x 320 x 165	15.6
HPF4764KA90	476	65641	4000K	70+	640 x 320 x 165	15.6
HPF6504KB90	650	95656	4000K	70+	750 x 560 x 300	34.5
HPF8064KB90	806	115272	4000K	70+	750 x 560 x 300	34.5
HPF9514KB90	951	131281	4000K	70+	750 x 560 x 300	34.5

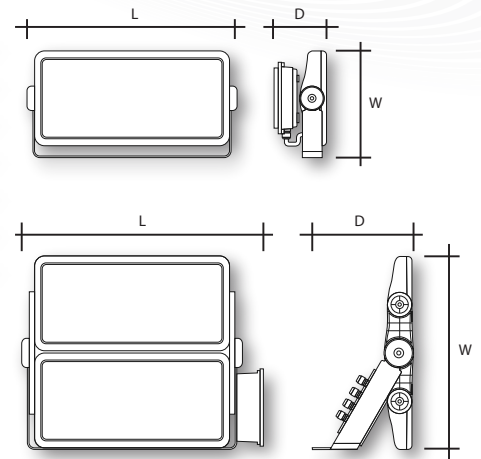

Optics

Additional Options:

Optics with 30x30° beam angle

Optics with 45x45° beam angle

Optics with 60x60° beam angle

Optics with 90x90° beam angle

Optics with asymmetric beam A1

Optics with asymmetric beam A2

Optics with asymmetric beam M1

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS