



wirefield

PROLED 100 MTR

100,000 hrs
L90/B10

STREET LIGHT



Technical Specification

- Die cast aluminium body and tempered glass cover. Post top mounting - Ø60mm.
- 140° x 140° beam angle.
- IP66.
- IK08.
- RAL colour options.


Features

Wattage	43w to 88w
Lumens per Watt	Up to 111
CRI	70+
L**B**	100,000 hours L90 B10
Driver	Fixed Output / DALI / CDIM
Controls	Photocell / 2 Level Auto-Dim
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	LM/W	CCT-K	L x W x H (mm)	Weight (kg)
MTR0434K	43	4830	111	4000	475 x 475 x 535	12.0
MTR0514K	51	5623	110	4000	475 x 475 x 535	12.0
MTR0684K	68	7498	110	4000	475 x 475 x 535	12.0
MTR0884K	88	9222	105	4000	475 x 475 x 535	12.0

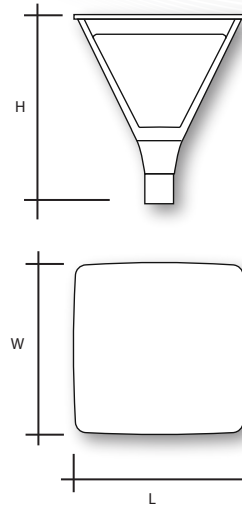

Control Options

Driver Options:

- Fixed Output
- DALI Driver
- CDIM

Sensor Options:

- Photocell
- 2 Level Auto-Dim

LED Options

Additional Options:

- CCT 3000K

Accessories

Optional Accessories:

- RAL colour option - specify RAL colour.
- Optics with asymmetric beam S1.

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS