



# wirefield PROLED 100 NET

**100,000 hrs**  
**L80/B50**

**IP66 EXTREME  
TEMPERATURE  
LUMINAIRE**



## Technical Specification

- PC body with opal PC diffuser.
- IP66.
- IK10.
- Stainless steel clips.
- Surface mount as standard and can be suspended.


## Features

Wattage	27w to 59w
Lumens per Watt	Up to 177
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim / Corridor Function
Colour Temperature	4000k
Temperature Rating	-40°C to +50°C

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
NET1274KB	27	4559	1272 x 96 x 111	2.1
NET1344KB	34	5665	1272 x 96 x 111	2.1
NET1404KB	40	6769	1272 x 96 x 111	2.1
NET1534KB	53	9118	1272 x 146 x 111	2.8
NET1244KC	24	4205	1572 x 96 x 111	2.6
NET1304KC	30	5178	1572 x 96 x 111	2.6
NET1434KC	43	7082	1572 x 96 x 111	2.6
NET1494KC	49	8461	1572 x 96 x 111	2.6
NET1594KC	59	10356	1572 x 146 x 111	3.3

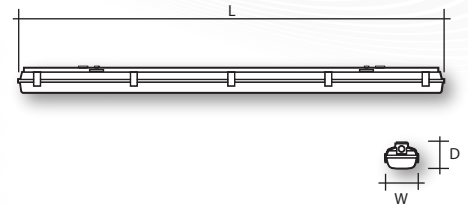

## Control Options

### Driver Options:

Fixed Output

DALI

Switch Dim

CF - Never off

CF - Off 1 minute

CF - Off 30 minutes

## LED Options

### Additional Options:

CCT 3000K

## Accessories

### Optional Accessories:

1.5m Adjustable Suspension Kit

3.0m Adjustable Suspension Kit

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

Luminaire is not suitable for full external mounting. Please review the GTB66 luminaire if required and speak to the Wirefield Sales Office for more information.

**LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS**