



# wirefield PROLED 100 OCC

**100,000 hrs**  
**L80/B50**


**RECESSED  
MODULAR**



## Technical Specification

- Steel body with perimeter opal diffuser.
- Recessed mounted into a 15mm/24mm ceiling grid.
- Low impact design
- IP40.
- IK05.
- Integral emergency available.
- RAL colour options.

## Features

Wattage	29w to 57w
Lumens per Watt	Up to 107
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / Microwave / 
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)


*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

# wirefield

# PROLED 100 OCC

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
OCC1294KB	29	3006	595 x 595 x 70	3.1
OCC1394KB	39	4227	595 x 595 x 70	3.1
OCC1574KB	57	5859	595 x 595 x 70	3.1

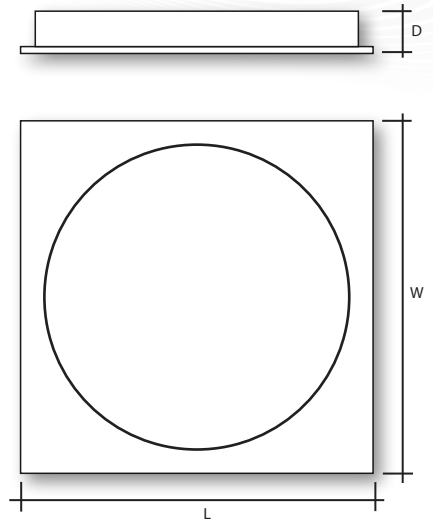

## Control Options

### Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

### Sensor Options:

PIR

Microwave

Eye-Wi

## LED Options

### Additional Options:

CCT 3000K

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: [www.wirefield.co.uk](http://www.wirefield.co.uk) Email: [sales@wirefield.co.uk](mailto:sales@wirefield.co.uk)

WIREFIELD 201901 V1.0