



wirefield PROLED 100 OCP

100,000 hrs
L80/B50

**RECESSED
MODULAR**



Technical Specification

- Steel body with microprismatic diffuser.
- Recessed mounted into a 15mm/24mm ceiling grid.
- Available in 600x300, 600x600, 1200x300 and 1200x600mm.
- IP44.
- IK05.
- Low glare.
- Integral emergency available.
- RAL colour options.

Features


Wattage	10w to 65w
Lumens per Watt	Up to 163
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / Microwave / 
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED 100 OCP

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
OCP1114KA	10	1360	595 x 295 x 40	2.0
OCP1154KA	13	1885	595 x 295 x 40	2.0
OCP1204KA	19	2827	595 x 295 x 40	2.0
OCP2204KB	17	2721	595 x 595 x 40	3.5
OCP2314KB	26	3942	595 x 595 x 40	3.5
OCP2394KB	33	5158	595 x 595 x 40	3.5
OCP3304KB	25	4081	595 x 595 x 40	3.5
OCP3434KB	36	5655	595 x 595 x 40	3.5
OCP3584KB	49	7736	595 x 595 x 40	3.5
OCP1194KC	17	2721	1195 x 295 x 40	3.5
OCP1264KC	26	3942	1195 x 295 x 40	3.5
OCP1394KC	33	5158	1195 x 295 x 40	3.5
OCP2364KD	34	5442	1195 x 595 x 40	6.5
OCP2514KD	44	6877	1195 x 595 x 40	6.5
OCP2774KD	65	10315	1195 x 595 x 40	6.5

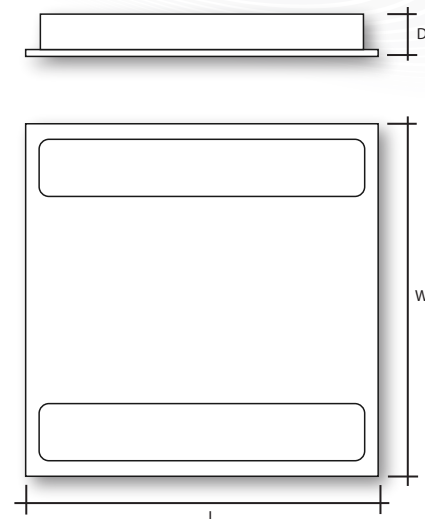

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

Sensor Options:

PIR

Microwave

Eye-Wi

LED Options

Additional Options:

CCT 3000K

Tunable White

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Open area and escape route lens available

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk