



wirefield PROLED 100 PBR

100,000 hrs
L80/B50

RECESSED MODULAR



Technical Specification

- Steel body, matt aluminium louvre and opal diffuser with asymmetric optic.
- Recessed mounted into a 15mm/24mm ceiling grid.
- Available in 595 x 185 and 1195 x 185mm lengths.
- IP40.
- IK02.
- Emergency available.


Features

Wattage	15w to 41w
Lumens per Watt	Up to 113
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	None Integral
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
PBR1153KA	15	1445	595 x 185 x 60	1.9
PBR1213KA	21	2131	595 x 185 x 60	1.9
PBR1303KD	30	3051	1195 x 185 x 60	3.6
PBR1413KD	41	4499	1195 x 185 x 60	3.6
PBR1154KD	15	1510	595 x 595 x 60	1.9
PBR1214KD	21	2226	595 x 595 x 60	1.9
PBR1304KD	30	3187	1195 x 185 x 60	3.6
PBR1414KD	41	4700	1195 x 185 x 60	3.6

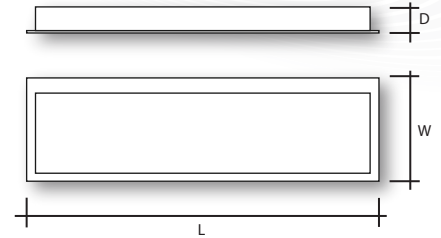

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with **Eye-Wi**
Reporting

Accessories

Optional Accessories:

Kit for Plasterboard Ceiling

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS