



# wirefield PROLED 100 REL

**100,000 hrs**  
**L80/B50**

**SURFACE OR  
SUSPENDED  
LINEAR**



## Technical Specification

- Steel powder coated RAL 9007 grey or RAL9003 white with polished aluminium louvre.
- Surface mounted or suspended via 2m kit (supplied seperately).
- Available in 4ft and 5ft lengths with lumen outputs tp to 6550.
- IP20
- IK05.
- Integral emergency available.


## Features

Wattage	19w to 60w
Lumens per Watt	Up to 114
CRI	80
L**B**	100,000 hours L80 B50
Driver	Dali / 1-10V
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

### Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	A (mm)	C (mm)	Weight (kg)
REL1194K121	19	2100	1245 x 160 x 55	900	990	2.5
REL2134K122	26	3050	1245 x 245 x 55	900	990	4.0
REL2204K122	39	4100	1245 x 245 x 55	900	990	4.0
REL1304K151	30	3200	1545 x 160 x 55	1200	1290	3.0
REL2224K152	43	4900	1545 x 245 x 55	1200	1290	5.0
REL2304K152	60	6500	1545 x 245 x 55	1200	1290	5.0

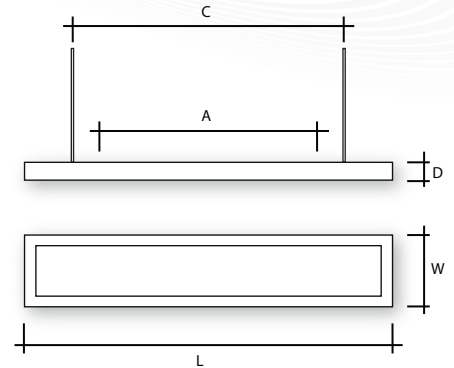

### Control Options

**Driver Options:**

DALI Driver

1-10v

### LED Options

**Additional Options:**

CCT 3000K

### Emergency Options

**Emergency Options:**

Integral 3 hour emergency

Integral 3 hour emergency with auto test function

### Accessories

**Optional Accessories:**

Matt Aluminium Louvre

2m Suspension Kit

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*