



wirefield

# PROLED 100 REL LG3

**100,000 hrs**  
**L80/B50**

SUSPENDED LINEAR  
DIRECT/INDIRECT



## Technical Specification

- Steel powder coated RAL 9007 grey or RAL9003 white with polished aluminium louvre.
- Suspended mounting with 2m kit (supplied).
- Each circuit can be wired separately for direct and/or indirect light.
- IP20.
- IK05.
- Integral emergency available.
- UGR <19.


## Features

Wattage	56w & 82w
Lumens per Watt	Up to 111
CRI	80
L**B**	100,000 hours L80 B50
Driver	Dali / 1-10V
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	C (mm)	Weight (kg)
REL2274K12	56	5800	1245 x 245 x 55	900	5.5
REL2404K15	82	8800	1545 x 245 x 55	1290	7.0

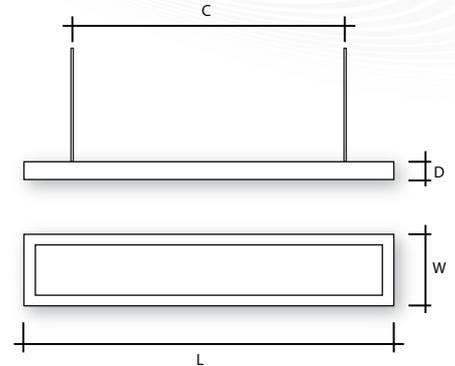

Control Options

Driver Options:

DALI Driver

1-10v

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

Integral 3 hour emergency

Integral 3 hour emergency with auto test function

Accessories

Optional Accessories:

Matt Aluminium Louvre

2m Suspension Kit

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS