



wirefield

PROLED 100 RLN

100,000 hrs
L80/B50

RECESSED LINEAR FOR
SUSPENDED CEILING



Technical Specification

- Powder coated steel body.
- Opal PMMA or micro-prismatic diffuser.
- 595mm and 1195mm option.
- Emergency options.
- In-line connection option.

Features


Wattage	14w to 26w
Lumens per Watt	Up to 124
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED RLN UGR

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
RLN1144KA	14	1494	4000K	595 x 95 x 62	1.80
RLN1194KA	19	2027	4000K	595 x 95 x 62	1.80
RLN1264KB	26	2989	4000K	1195 x 95 x 62	2.40
RLN1384KB	38	4053	4000K	1195 x 95 x 62	2.40

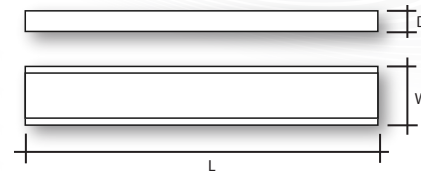

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Accessories

Optional Accessories:

3 Pole or 5 pole pre-wired Wieland connector - 0.5m

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk