



wirefield PROLED 100 RLS

100,000 hrs
L80/B50

RECESSED LINEAR FOR
SUSPENDED CEILING



Technical Specification

- Powder coated steel body.
- Micro-prismatic diffuser.
- IP40.
- IK02.
- Emergency options.
- In-line connection option.


Features

Wattage	11w
Lumens per Watt	Up to 114
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
RLS1113K	11	981	3000K	336 x 336 x 62	2.20
RLS1153K	15	1331	3000K	336 x 336 x 62	2.20
RLS1114K	11	1025	4000K	336 x 336 x 62	2.20
RLS1154K	15	1390	4000K	336 x 336 x 62	2.20

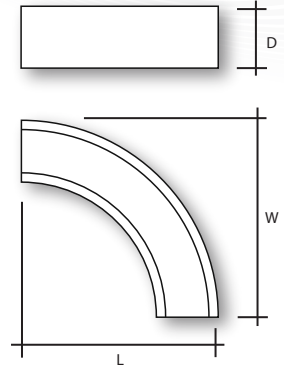

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

LED Options

Additional Options:

CCT 3000K

Tunable White 2700K to 6500K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Accessories

Optional Accessories:

3 Pole or 5 pole pre-wired Wieland connector - 0.5m

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS