



wirefield PROLED 100 SCP

100,000 hrs
L80/B50

**SURFACE OR
SUSPENDED LINEAR**



Technical Specification

- Steel body with micro prismatic polycarbonate diffuser.
- White end caps with security screw fixing.
- Surface or suspended mounting.
- IP54.
- IK05.
- Integral emergency options.
- RAL colour options.


Features

Wattage	10w to 48w
Lumens per Watt	Up to 162
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V / Corridor Function
Controls	PIR / MW / MWRF dimming / MWRF non-dimming
Colour Temperature	4000k
Temperature Rating	-15°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SCP1104KA	10	1475	615 x 97 x 72	1.5
SCP1144KA	14	2675	615 x 97 x 72	1.5
SCP1174KA	17	2675	615 x 97 x 72	1.5
SCP1204KA	20	3031	615 x 97 x 72	1.5
SCP1174KA	17	2689	1175 x 97 x 72	2.3
SCP1224KA	22	3507	1175 x 97 x 72	2.3
SCP1294KA	29	4570	1175 x 97 x 72	2.3
SCP1334KA	33	4570	1175 x 97 x 72	2.3
SCP1384KA	38	6062	1175 x 97 x 72	2.3
SCP1214KC	21	3362	1455 x 97 x 72	2.8
SCP1274KC	27	4383	1455 x 97 x 72	2.8
SCP1364KC	36	5713	1455 x 97 x 72	2.8
SCP1424KC	42	6688	1455 x 97 x 72	2.8
SCP1484KC	48	7577	1455 x 97 x 72	2.8

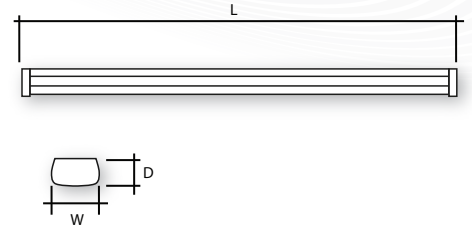

Control Options

Driver Options:

Fixed Output

DALI

1-10v

CF - Never off

CF - Off 1 minute

CF - Off 30 minutes

Sensor Options:

PIR

MW - On/Off

MWRF - Corridor function master or slave dimming

MWRF - Corridor function master or slave non-dimming

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

Accessories

Optional Accessories:

1.5m Adjustable Suspension Kit

2.0m Transparent 3 x 0.75mm Cable

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS