



wirefield PROLED 100 TRA

100,000 hrs
L80/B50

SURFACE LINEAR
IP65 ANTI-VANDAL



Technical Specification

- Steel powder coated white body with opal diffuser fastened with vandal resistant screws in a steel frame.
- Surface mount as standard.
- IP65.
- IK10.
- Integral emergency available.
- RAL colour options.

Features


Wattage	10w to 54w
Lumens per Watt	Up to 141
CRI	80
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	Microwave
Colour Temperature	4000k
Temperature Rating	-20°C to +40°C (excluding emergency)

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
TRA1104KA*	10	1296	380 x 135 x 135	3.0
TRA1134KA*	13	1636	380 x 135 x 135	3.0
TRA1144KB	14	1780	660 x 135 x 135	3.5
TRA1194KB	19	2466	660 x 135 x 135	3.5
TRA1224KB	22	3078	660 x 135 x 135	3.5
TRA1194KC	19	2670	940 x 135 x 135	5.5
TRA1284KC	28	3699	940 x 135 x 135	5.5
TRA1324KC	33	4451	940 x 135 x 135	5.5
TRA1254KD	25	3288	1220 x 135 x 135	7.4
TRA1374KD	37	4931	1220 x 135 x 135	7.4
TRA1434KD	43	5936	1220 x 135 x 135	7.4
TRA1314KE	31	4110	1500 x 135 x 135	9.2
TRA1414KE	41	5623	1500 x 135 x 135	9.2
TRA1464KE	46	6165	1500 x 135 x 135	9.2
TRA1544KE	54	7419	1500 x 135 x 135	9.2

*EMERGENCY NOT AVAILABLE

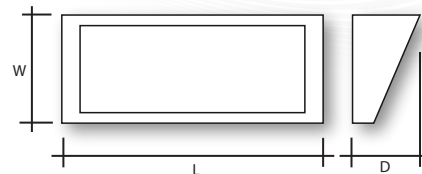

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

Sensor Options:

Microwave

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

Accessories/Options

Optional Accessories:

Various RAL Colours

Security Drill Bit for 2 Hole Fixing

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS