




# wirefield PROLED 100 TRF

**100,000 hrs**  
**L80/B50**

**DIRECT/INDIRECT  
OR SURFACE  
MOUNT**

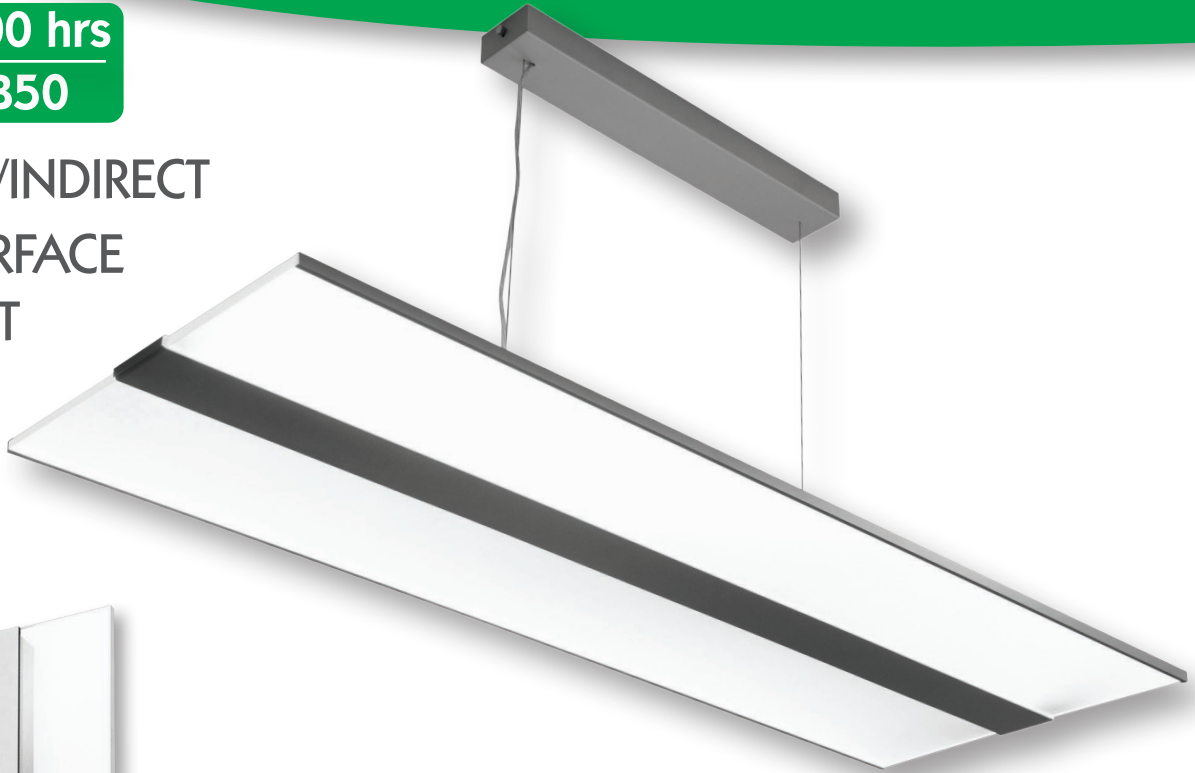

**SURFACE  
MOUNT**

## Technical Specification

- Translucent acrylic with central metal section.
- Surface mount 600mm or suspended 1200mm luminaire.
- Direct/Indirect luminaire.
- IP20.
- IK05.
- Emergency not available.



## Features

Wattage	26w to 77w
Lumens per Watt	Up to 96
CRI	80
L**B**	100,000 hours L80 B50
Driver	Dali
Colour Temperature	4000k
Temperature Rating	0°C to +35°C

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	A (mm)	Weight (kg)
TRF25/S	26	2500	638 x 435 x 49	-	4.5
TRF41/P	44	4100	1227 x 435 x 49	500	7.0
TRF58/P	63	5800	1227 x 435 x 49	500	7.0
TRF71/P	77	7100	1227 x 435 x 49	500	7.0

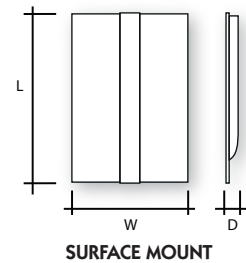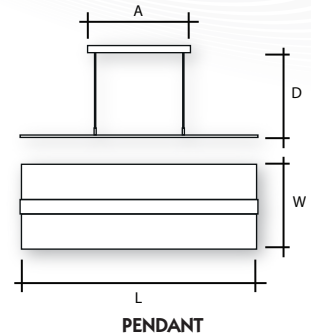

## Control Options

### Driver Options:

DALI Driver

## LED Options

### Additional Options:

CCT 3000K

Tunable White

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*