



wirefield PROLED 100 TRW

100,000 hrs
L80/B50

WALL MOUNT
ANTI-VANDAL



Technical Specification

- Steel powder coated white body with opal diffuser fastened with vandal resistant screws in a steel frame.
- Surface mount as standard.
- IP65.
- IK10.
- Integral emergency available.
- RAL colour options.


Features

Wattage	10w to 13w
Lumens per Watt	128
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	Microwave
Colour Temperature	4000k
Temperature Rating	-20°C to +40°C

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x H (mm)	Weight (kg)
TRW1103K	10	1162	390 x 110 x 150	3.0
TRW1113K	13	1468	390 x 110 x 150	3.0
TRW1104K	10	1295	390 x 110 x 150	3.0
TRW1114K	13	1636	390 x 110 x 150	3.0

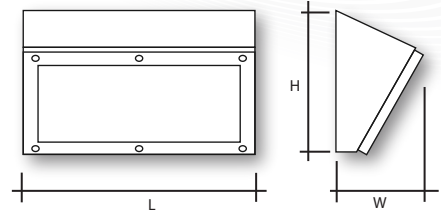

Control Options

Driver Options:

Fixed Output

DALI Driver

Switch Dim

Sensor Options:

Microwave

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

Accessories

Optional Accessories:

ZN Primer to enhance corrosion resistance

Various RAL colours

Security bit for 2 hole fixing

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS