



wirefield

PROLED 100 WSD

100,000 hrs
L80/B50

WALL OR
SUSPENDED
ASYMMETRIC
LINEAR



Technical Specification

- Powder coated steel body.
- Asymmetric lens for blackboard or display illumination.
- IP40
- IK05
- Joint kit option for continuous runs.
- Integral emergency options.
- Wall or suspended mounting.
- RAL colour options.

Features


Wattage	20w to 31w
Lumens per Watt	Up to 154
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED 100 WSD

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x H (mm)	Weight (kg)
WSD1204KA	20	2973	4000K	1170 x 73 x 80	2.50
WSD1254KA	25	3668	4000K	1170 x 73 x 80	2.50
WSD1244KB	24	3716	4000K	1457 x 73 x 80	3.20
WSD1314KB	31	4585	4000K	1457 x 73 x 80	3.20

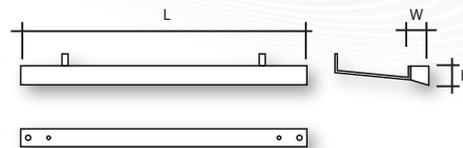

Control Options

Driver Options:

Fixed Output

DALI Driver

Switch Dim

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Accessories

Optional Accessories:

RAL Colour Options

1.5m Suspension Kit

Wall Mounting Kit

I - Joint Kit for Continuous Run

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk