



wirefield

# PROLED50 CSA HP

50,000 hrs  
L80/B50

RECESSED  
CIRCULAR  
GIMBAL



## Technical Specification

- Powder coated die cast aluminium body.
- Recessed mounting.
- 40° faceted aluminium reflector.
- CRI80 and CRI90 option.
- IP20.

## Features


Wattage	26w or 41w
Lumens per Watt	Up to 112
CRI	80+
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +40°C

LIGHTING INNOVATION FOR RETAIL APPLICATIONS

# wirefield PROLED50 CSA HP

## Product Specification

Code	Watts	Delivered lumens	CCT	CRI	∅ x H (mm)	Cut Out (mm)	Weight (kg)
CSA1283K80FL	28	3002	3000	80+	180 x 125	170	1.4
CSA1413K80FL	41	4392	3000	80+	180 x 125	170	1.5
CSA1284K80FL	28	3079	4000	80+	180 x 125	170	1.7
CSA1414K80FL	41	4506	4000	80+	180 x 125	170	1.7
CSA1283K90FL	26	2511	3000	90+	180 x 125	170	1.4
CSA1413K90FL	41	3615	3000	90+	180 x 125	170	1.5
CSA1284K90FL	26	2684	4000	90+	180 x 125	170	1.7
CSA1414K90FL	41	3864	4000	90+	180 x 125	170	1.7

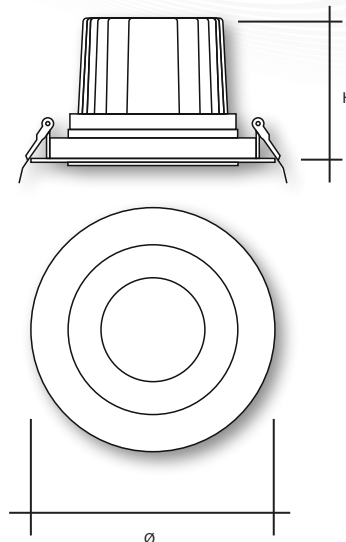

## Control Options

### Driver Options:

Fixed Output

DALI Driver

Switch Dim

## Reflector Options

### Additional Options:

24° faceted aluminium reflector

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR RETAIL APPLICATIONS*

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: [www.wirefield.co.uk](http://www.wirefield.co.uk) Email: [sales@wirefield.co.uk](mailto:sales@wirefield.co.uk)