




wirefield

# PROLED50 EGR & EGS

**50,000 hrs**  
**L80/B50**

ARCHITECTURAL  
GROUND LIGHT

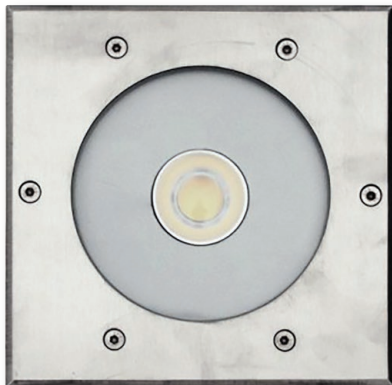

## Technical Specification

- Die cast aluminium body.
- Frosted tempered glass diffuser.
- 316 grade stainless steel cover.
- IP67.
- IK10.

## Features


Wattage	10w to 23w
Lumens per Watt	Up to 114
CRI	80+
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*

## Product Specification

### ROUND

Code	Watts	Delivered lumens	CCT	L x W x H (mm)	Weight (kg)
EGR1114K60	11	1071	4000	235 x 200 x 200	4.5
EGR1154K60	15	1439	4000	235 x 200 x 200	4.5
EGR1234K60	23	1939	4000	235 x 200 x 200	4.5

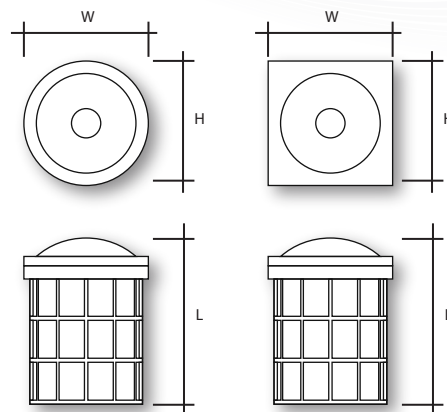

### SQUARE

Code	Watts	Delivered lumens	CCT	L x W x H (mm)	Weight (kg)
EGS1114K60	11	1071	4000	235 x 200 x 200	4.5
EGS1154K60	15	1439	4000	235 x 200 x 200	4.5
EGS1234K60	23	1939	4000	235 x 200 x 200	4.5

## Control Options

### Driver Options:

Fixed Output

DALI Driver

## LED Options

### Additional Options:

CCT 3000K

## Accessories

### Optional Accessories:

30° x 30° beam angle

45° x 45° beam angle

Asymmetric beam angle

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*