



wirefield PROLED50 ESL

50,000 hrs
L70/B50

**LARGE ARCHITECTURAL
FLOOD**



Technical Specification

- Die cast aluminium body with tempered glass cover.
- 30° beam angle.
- IP65.
- IK08.


Features

Wattage	73w to 117w
Lumens per Watt	Up to 115
CRI	70+
L**B**	50,000 hours L70 B50
Driver	Fixed Output / Dali / Auto 2-step dimming
Controls	Auto 2-step dimming
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	Ø x D (mm)	Weight (kg)
ESL1734KC	73	8396	4000K	310 x 137	6.5
ESL1994KC	99	10560	4000K	310 x 137	6.5
ESL11174KC	117	11977	4000K	310 x 137	6.5

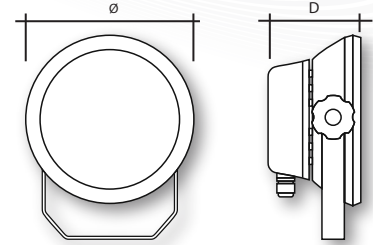

Control Options

Driver Options:

Fixed output

DALI

Auto 2-step dimming

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS