



# wirefield PROLED50 ESP

**50,000 hrs**  
**L70/B50**

ARCHITECTURAL  
FLOOD



## Technical Specification

- Die cast aluminium body with tempered glass cover.
- 30° beam angle.
- IP65.
- IK08.


## Features

Wattage	32w to 57w
Lumens per Watt	Up to 118
CRI	70+
L**B**	50,000 hours L70 B50
Driver	Fixed Output / Dali / Auto 2-step dimming
Controls	Auto 2-step dimming
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*

### Product Specification

Code	Watts	Delivered lumens	CCT	Ø x D (mm)	Weight (kg)
ESP1324KB	32	3739	4000K	230 x 118	3.7
ESP1494KB	49	5280	4000K	230 x 118	3.7
ESP1574KB	57	5891	4000K	230 x 118	3.7

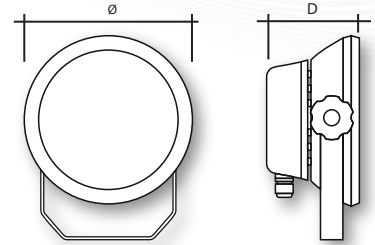

### Control Options

**Driver Options:**

Fixed output

DALI

Auto 2-step dimming

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*