

wirefield PROLED50 ESS

50,000 hrs
L70/B50

COMPACT ARCHITECTURAL FLOOD



Technical Specification

- Die cast aluminium body with tempered glass cover.
- 30° beam angle.
- IP65.
- IK08.


Features

Wattage	8w & 11w
Lumens per Watt	Up to 103
CRI	70+
L**B**	50,000 hours L70 B50
Driver	Fixed Output
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	Ø x D (mm)	Weight (kg)
ESS1084K	8	802	4000K	120 x 90	0.9
ESS1114K	11	1087	4000K	120 x 90	0.9

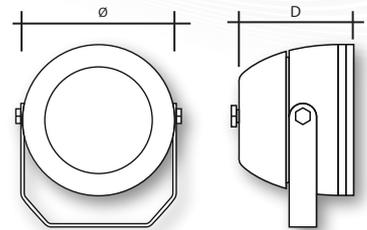

Control Options

Driver Options:

Fixed Output

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS