



wirefield PROLED50 ETB

50,000 hrs
L70/B50

WALL OR SURFACE MOUNTED
ARCHITECTURAL LUMINAIRE



Technical Specification

- Powder coated die cast aluminium housing.
- Tempered safety glass lens cover.
- 30°, 45° & 60° beam angle options.
- IP65.
- IK08.
- RAL colour options.

Features


Wattage	10w to 2 x 22w
Lumens per Watt	Up to 120
L*B**	50,000 hours L70 B50
Driver	Constant Current
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS

Product Specification

UP AND DOWN

Code	Watts	Delivered lumens	H (mm)	Ø (mm)	Weight (kg)
ETB2214K60	2 x 9.5	2171	464	155	3.2
ETB2294K60	2 x 13	2978	464	155	3.2
ETB2434K60	2 x 19	4133	464	155	3.2

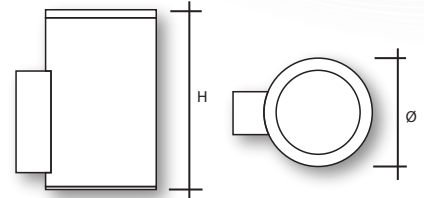

UP OR DOWN

Code	Watts	Delivered lumens	H (mm)	Ø (mm)	Weight (kg)
ETB1114K60	10	1086	250	155	2.2
ETB1154K60	13	1489	250	155	2.2
ETB1234K60	19	2067	250	155	2.2

DOWN

Code	Watts	Delivered lumens	H (mm)	Ø (mm)	Weight (kg)
ETB1114K60S	10	1086	250	155	2.2
ETB1154K60S	13	1489	250	155	2.2
ETB1234K60S	19	2067	250	155	2.2

Options

Additional Options:

- 30° reflector
- 45° reflector
- 60° reflector
- Ral colour options

LED Options

Additional Options:

- CCT 3000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS