



# wirefield PROLED50 ETB

**50,000 hrs**  
**L70/B50**

WALL OR SURFACE MOUNTED  
ARCHITECTURAL LUMINAIRE



### Technical Specification

- Powder coated die cast aluminium housing.
- Tempered safety glass lens cover.
- 30°, 45° & 60° beam angle options.
- IP65.
- IK08.
- RAL colour options.

### Features


Wattage	10w to 2 x 22w
Lumens per Watt	Up to 120
L**B**	50,000 hours L70 B50
Driver	Constant Current
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*

## Product Specification

### UP AND DOWN

Code	Watts	Delivered lumens	H (mm)	Ø (mm)	Weight (kg)
ETB2203K60	2 x 10	2341	464	155	3.2
ETB2273K60	2 x 14	3211	464	155	3.2
ETB2393K60	2 x 20	4457	464	155	3.2
ETB2214K60	2 x 11	2142	464	155	3.2
ETB2294K60	2 x 15	2878	464	155	3.2
ETB2434K60	2 x 22	3878	464	155	3.2

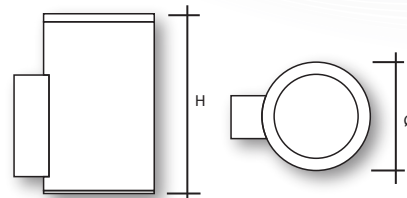

### UP OR DOWN

Code	Watts	Delivered lumens	H (mm)	Ø (mm)	Weight (kg)
ETB1103K60	10	1170	250	155	2.2
ETB1143K60	14	1606	250	155	2.2
ETB1213K60	20	2229	250	155	2.2
ETB1114K60	11	1071	250	155	2.2
ETB1154K60	15	1439	250	155	2.2
ETB1234K60	22	1939	250	155	2.2

### DOWN

Code	Watts	Delivered lumens	H (mm)	Ø (mm)	Weight (kg)
ETB1103K60S	10	1170	250	155	2.2
ETB1143K60S	14	1606	250	155	2.2
ETB1213K60S	20	2229	250	155	2.2
ETB1114K60S	11	1071	250	155	2.2
ETB1154K60S	15	1439	250	155	2.2
ETB1234K60S	22	1939	250	155	2.2

## Options

#### Additional Options:

30° reflector  
45° reflector  
60° reflector  
Ral colour options

## LED Options

#### Additional Options:

CCT 3000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*