



# wirefield PROLED50 HPF

**50,000 hrs**  
**L80/B10**

**HIGH POWER  
FLOODLIGHT**



## Technical Specification

- Powder coated die cast aluminium housing.
- 5mm tempered safety glass lens cover.
- Constant current driver.
- 4 beam angle options.
- IP66.
- IK09.
- RAL colour options.

## Features


Wattage	380w, 480w and 600w
Lumens per Watt	Up to 127
L*B**	50,000 hours L80 B10
Driver	Constant Current / Dali / 1-10V
Colour Temperature	4000k
Temperature Rating	-25°C to +55°C

*LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
HPF3804K*	380	42840	873 x 629 x 270	26.4
HPF4804K*	480	57120	873 x 629 x 270	26.4
HPF6004K*	600	73400	1080 x 629 x 270	30.0

\* For Optics, please add A - Asymmetrical, B - 40°, C - 60°, E - 90°

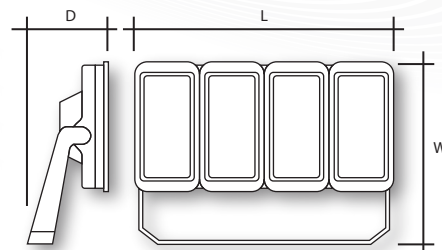

## Control Options

### Driver Options:

Constant Current

DALI Driver

1-10v

## LED Options

### Additional Options:

CCT 3000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS*